



ACENOX KITCHEN EQUIPMENT CO., LTD.

PRODUCT CATALOGUE 2026

Commercial Refrigeration and Kitchen Equipment

Factory direct | Custom sizes and finishes | OEM welcome

Factory 1: 239 Road, East Industrial Zone, Binzhou City, Shandong Province, China

Factory 2: Haihe Road, Jimo District, Qingdao City, Shandong Province, China

Email: sales@acenoxappliances.com

Website: <https://acenoxappliances.com>

Tel / WhatsApp: +1 737 248 0271

WHOLE-CHAIN COMMERCIAL REFRIGERATION



Cake Display Counters



Glass Door Display Chillers



Open Display Fridges



Gelato & Ice Cream Showcases



GN Upright Cabinets



Counters, Saladettes & Prep Tables

acenoxappliances.com



COMPANY PROFILE

公司介绍

With over a decade of experience in the commercial kitchen equipment industry, we have two factories, covering a total of 20000 square meters. As a young, flexible, energetic, and quick-response team, we take pride in offering an extensive range of products, including commercial refrigeration equipment and stainless steel fabricated products such as work tables, sinks, hoods, and cupboards. These products are proven perfect selling in the United Kingdom, Portugal, Israel, India, Australia, Malaysia, South Africa, etc.

Our products are designed to meet the rigorous demands of commercial kitchens, using only the finest materials while adhering to strict quality standards to ensure their durability, functionality, and style. We are familiar with popular types and standards in different countries and can adjust according to the evolving markets of our customers.

Customized design and production are available here; our top engineer is good at innovating and designing new stylish models; our experienced workers are well-trained and highly skilled in their craft, allowing us to work it out for you.

山东亿瑞克厨房设备有限公司，致力于不锈钢厨房设备和商用冷藏冷冻柜产品的生产和销售已有近十年时间。主要生产产品为：不锈钢白钢调理类，超市冷冻冷藏柜，展示柜，雪柜，冰激淋柜，蛋糕展示柜等等。

公司引进世界先进的意大利生产设备和技术，以及国内领先的激光下料切割设备，计算机自动化控制系统等。拥有十几项专利。

公司自2019年开始发展国外市场，目前已出口十几个国家，质量稳定，制造工艺精益求精，在不牺牲产品质量的前提下，价格做到具有非常高的竞争力。未来，我们将不断在产品设计上进行更新迭代，为我们的客户提供更加节能环保、美观，有竞争力的产品。

20 余人

研发团队
More than 20 R&D team

100 余亩

占地
Covers an area of more than 100 acres

200 余人

生产一线员工
More than 200 frontline production employees

CONTENTS

01

Cake Display Counters and Display Refrigeration

Pages 4 to 12

Right angle, curved, bevel and countertop cake displays; glass door chillers and freezers; open display fridges

02

Gelato and Ice Cream Freezers

Pages 13 to 21

Ventilated and static gelato showcases, popsicle freezers, mini countertop freezers

03

Kitchen Refrigeration

Pages 22 to 59

GN upright fridges and freezers, fish and bakery cabinets, counters, pizza counters, saladettes, topping units, reach-ins, undercounters, prep tables, chef bases

04

Stainless Steel Fabricated Kitchen Equipment

Pages 60 to 75

Work tables, sinks, cabinets, hot cupboards, extraction hoods and filters, steam tables, shelving and trolleys

01

CAKE DISPLAY COUNTER

蛋糕展示柜

**Excellent Insulation Performance:**

we use an integral foaming insulation method. It means that a molding machine makes the basement of the cake chiller at one time, which provides excellent sealing performance.

Materials:

this cake display chiller use stainless steel 430 with a mirror surface; it shows a shining surface of the basements, which looks brilliant.

- ▶ Stainless steel 201/304/430
- ▶ Marble
- ▶ Painted Steel

Compressor & Refrigerant:

- ▶ Embraco compressor
- ▶ Donper compressor(china brand)
- ▶ Danfos compressor
- ▶ R134a/R290

**Temperature Control:**

we use the superior quality brand, Carel brand and Dixell brand from Italy, and Angel brand from China.

- ▶ +2°C~+8°C
- ▶ Automatically operate beyond the set range.

**Anti-fog Low-E Glasses:**

To maximize fog prevention, we added another device, the hot-air blowing function in front of the glasses, which cost less.

- ▶ Tempered glasses
- ▶ Ultra clear glasses, double layers
- ▶ Heating wire glasses for options

**Heavy Duty shelves:**

Each shelf can load over 30kg of food. Materials are stainless steel with aluminous decoration. The pattern of shelves could be customized.

**Sliding doors:**

- ▶ Aluminum alloy frame with heating wire inside to prevent the fog
- ▶ Sealing strip on the frame to enhance the sealing property and keep the temperature inside



LINEAR SERIES 直角系列

CAKE DISPLAY COUNTER

直角蛋糕展示柜3层

- LONGER BLACK GLASSES AT SIDES



Model	型号	A900F3SL	A1200F3SL	A1500F3SL	A1800F3SL	A2000F3SL
Size(mm)	尺寸	900×700×1270	1200×700×1270	1500×700×1270	1800×700×1270	2000×700×1270
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Color	颜色	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	145kg	153kg	215kg	245kg	265kg
Gross Weight	毛重	160kg	170kg	230kg	260kg	285kg

RIGHT ANGLE CAKE
DISPLAY COUNTER

直角蛋糕展示柜

- STAINLESS STEEL COLOR BASEMENT



Model	型号	A900F3S	A1200F3S	A1500F3S	A1800F3S	A2000F3S
Size(mm)	尺寸	900×700×1270	1200×700×1270	1500×700×1270	1800×700×1270	2000×700×1270
Power	功率	275W	375W	450W	615W	615W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Color	颜色	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	145kg	153kg	215kg	245kg	265kg
Gross Weight	毛重	160kg	170kg	230kg	260kg	285kg



CAKE DISPLAY COUNTER

直角蛋糕展示柜3层

- SHRINKED BASEMENT

Model	型号	A900F3SD	A1200F3SD	A1500F3SD	A1800F3SD	A2000F3SD
Size(mm)	尺寸	900×700×1270	1200×700×1270	1500×700×1270	1800×700×1270	2000×700×1270
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Color	颜色	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	145kg	153kg	215kg	245kg	265kg
Gross Weight	毛重	160kg	170kg	230kg	260kg	285kg

RIGHT ANGLE CAKE
DISPLAY COUNTER

直角蛋糕展示柜黑色

- BLACK STEEL BASEMENT

Model	型号	A900F3B	A1200F3B	A1500F3B	A1800F3B	A2000F3B
Size(mm)	尺寸	900×700×1270	1200×700×1270	1500×700×1270	1800×700×1270	2000×700×1270
Power	功率	275W	375W	450W	615W	615W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Color	颜色	Black mirror stainless steel, Black matte stainless steel				
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	145kg	153kg	215kg	245kg	265kg
Gross Weight	毛重	160kg	170kg	230kg	260kg	285kg



RIGHT ANGLE CAKE DISPLAY COUNTER

直角二层蛋糕展示柜

● TWO SHELVES

Model	型号	A900F2S	A1200F2S	A1500F2S	A1800F2S	A2000F2S
Size(mm)	尺寸	900×700×1200	1200×700×1200	1500×700×1200	1800×700×1200	2000×700×1200
Power	功率	275W	375W	450W	615W	615W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
NO. of shelves	层架数量	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Capacity	容积	2	2	2	2	2
Temperature	温度	350L	480L	600L	720L	850L
Color	颜色	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	120kg	135kg	190kg	217kg	242kg
Gross Weight	毛重	135kg	150kg	205kg	232kg	257kg



WHITE COLOR CAKE DISPLAY COUNTER

白色蛋糕展示柜

Model	型号	A900F2W	A1200F2W	A1500F2W	A1800F2W	A2000F2W
Size(mm)	尺寸	900×670×1230	1200×670×1230	1500×670×1230	1800×670×1230	2000×670×1230
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Color	颜色	White	White	White	White	White
NO. of shelves	层架数量	2	2	2	2	2
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	120kg	135kg	190kg	217kg	242kg
Gross Weight	毛重	135kg	150kg	205kg	232kg	257kg

FLOW SERIES 弧形系列

CURVED CAKE DISPLAY COUNTER

弧形蛋糕展示柜

● CURVED SHAPE



Model	型号	C900F3S	C1200F3S	C1500F3S	C1800F3S	C2000F3S
Size(mm)	尺寸	900×700×1260	1200×700×1260	1500×700×1260	1800×700×1260	2000×700×1260
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Curved	Curved	Curved	Curved	Curved
Color	颜色	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	125kg	133kg	195kg	225kg	240kg
Gross Weight	毛重	140kg	150kg	210kg	240kg	260kg



GOLDEN COLOR CURVED CAKE DISPLAY COUNTER

金色弧形蛋糕展示柜

● CURVED SHAPE, GOLDEN COLOR

Model	型号	C900F3G	C1200F3G	C1500F3G	C1800F3G	C2000F3G
Size(mm)	尺寸	900×700×1270	1200×700×1270	1500×700×1270	1800×700×1270	2000×700×1270
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Curved	Curved	Curved	Curved	Curved
Color	颜色	Golden	Golden	Golden	Golden	Golden
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	375L	520L	650L	780L	920L
Temperature	温度	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C	2°C~8°C
Net Weight	净重	125kg	133kg	195kg	225kg	240kg
Gross Weight	毛重	140kg	150kg	210kg	240kg	260kg



IRONBARK SERIES 澳洲系列

RIGHT ANGLE CAKE DISPLAY COUNTER

澳洲款直角蛋糕展示柜

● WIRE STEEL SHELVES

Model	型号	AU900F3S	AU1200F3S	AU1500F3S	AU1800F3S	AU2000F3S
Size(mm)	尺寸	900×700×1350	1200×700×1350	1500×700×1350	1800×700×1350	2000×700×1350
Power	功率	275W	375W	450W	615W	715W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	450L	615L	770L	930L	980L
Temperature	温度	2°C-8°C	2°C-8°C	2°C-8°C	2°C-8°C	2°C-8°C
Color	颜色	Stainless steel, Black, Golden				
Net Weight	净重	160kg	172kg	220kg	240kg	280kg
Gross Weight	毛重	177kg	192kg	240kg	265kg	305kg

BEVEL SERIES 斜角系列

BEVEL CAKE DISPLAY COUNTER

斜款蛋糕展示柜

● BEVEL SHAPE



Model	型号	B900F3B	B1200F3B	B1500F3B	B1800F3B	B2000F3B
Size(mm)	尺寸	900×738×1270	1200×738×1270	1500×738×1270	1800×738×1270	2000×738×1270
Power	功率	275W	375W	450W	615W	615W
Cooling	制冷	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shape	形状	Bevel	Bevel	Bevel	Bevel	Bevel
Color	颜色	Black	Black	Black	Black	Black
NO. of shelves	层架数量	3	3	3	3	3
Capacity	容积	395L	550L	685L	815L	960L
Temperature	温度	2°C-8°C	2°C-8°C	2°C-8°C	2°C-8°C	2°C-8°C
Net Weight	净重	149kg	160kg	221kg	251kg	277kg
Gross Weight	毛重	164kg	175kg	236kg	266kg	292kg

COUNTER TOP SERIES 台式系列

COUNTER TOP CAKE DISPLAY COUNTER

台式蛋糕展示柜

● RIGHT ANGLE



Model	型号	660F2AT	900F2AT	1200F2AT
Size(mm)	尺寸	660×530×730	900×530×730	1200×530×730
Power	功率	158W	190W	200W
Cooling	制冷	Ventilated	Ventilated	Ventilated
Shape	形状	Right Angle	Right Angle	Right Angle
Color	颜色	Stainless Steel, Black		
NO. of shelves	层架数量	2	2	2
Capacity	容积	80L	120L	180L
Temperature	温度	2°C-8°C	2°C-8°C	2°C-8°C
Net Weight	净重	64kg	71kg	86kg
Gross Weight	毛重	71kg	78kg	93kg

COUNTER TOP CURVED CAKE DISPLAY COUNTER

台式蛋糕展示柜

● CURVED SHAPE




Model	型号	660F2CT	900F2CT	1200F2CT
Size(mm)	尺寸	660×530×730	900×530×730	1200×530×730
Power	功率	158W	190W	200W
Cooling	制冷	Ventilated	Ventilated	Ventilated
Shape	形状	Curved	Curved	Curved
Color	颜色	Stainless Steel	Stainless Steel	Stainless Steel
NO. of shelves	层架数量	2	2	2
Capacity	容积	80L	120L	180L
Temperature	温度	2°C-8°C	2°C-8°C	2°C-8°C
Net Weight	净重	64kg	71kg	86kg
Gross Weight	毛重	71kg	78kg	93kg

NEW MODEL



NEW MODEL

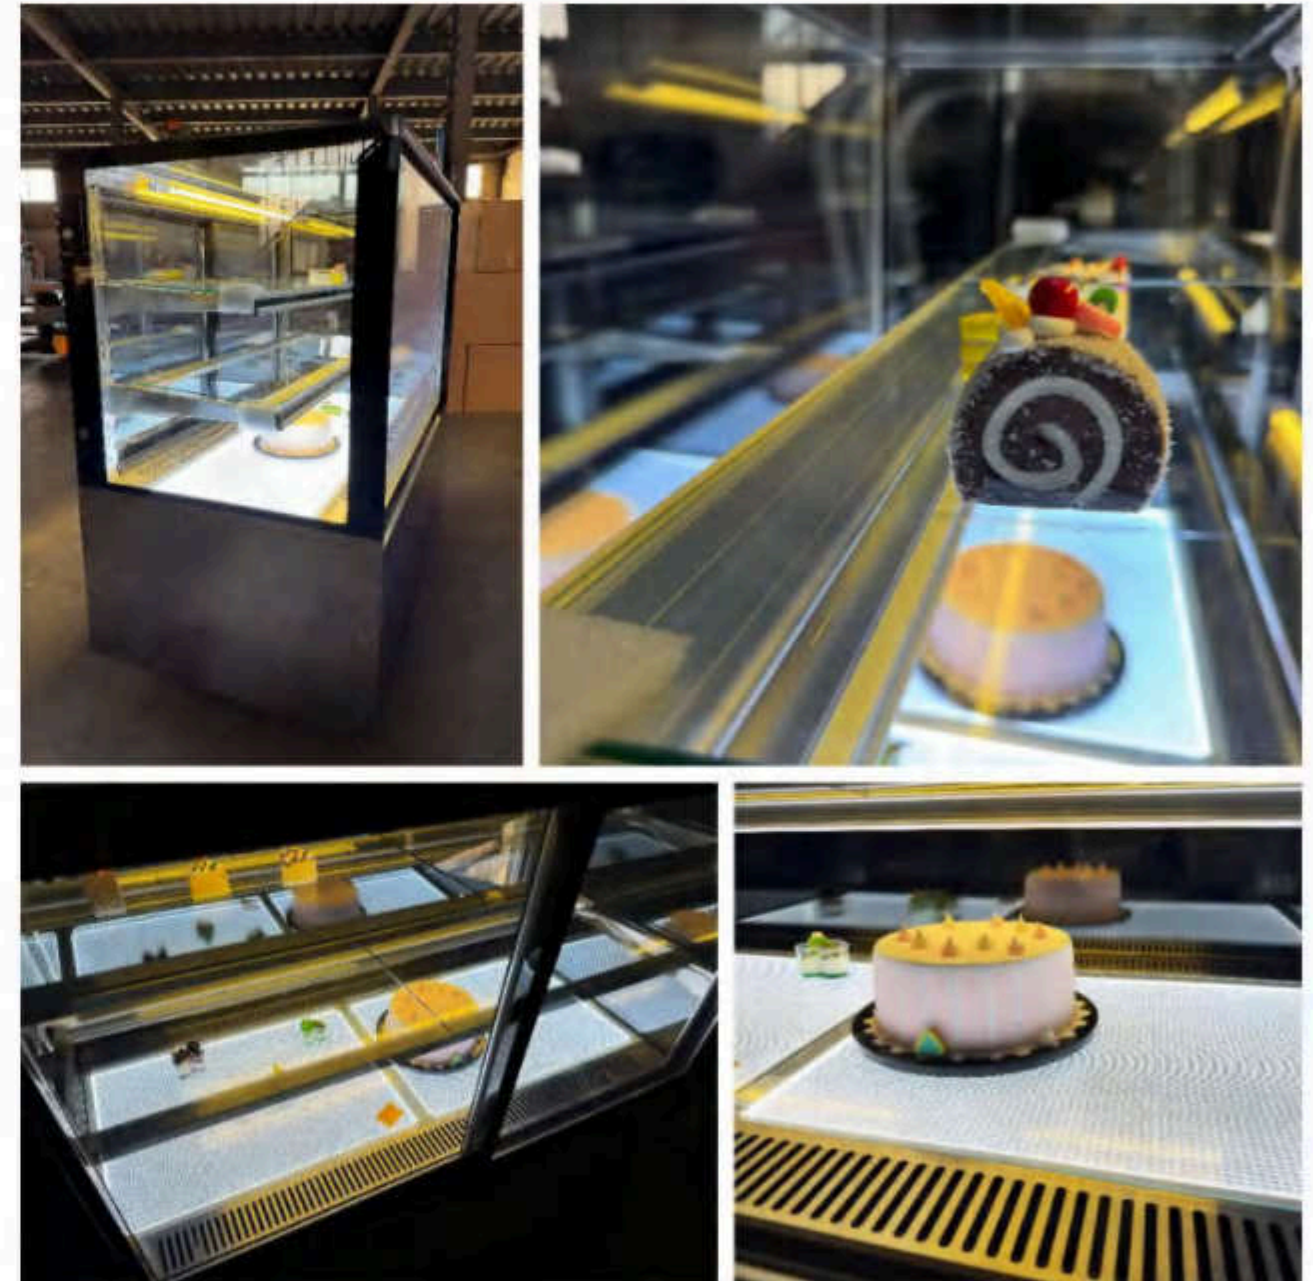



02

DISPLAY CHILLER AND FREEZER 冷藏展示柜/冷冻展示柜



APPLICATION
适用范围

Temperature $\leq 32^{\circ}\text{C}$

humidity
below **56%**

DISPLAY CHILLER 玻璃展示冷藏柜

Glass Display chillers have a better attractive appearance to display beverages, beers, coco cola, and all kinds of drinks. The application of display chillers spans across various industries, including supermarkets, convenience stores, bakeries, restaurants, delicatessens, and ice cream parlors.

Model Features:

- Self-closing doors, double layers tempered glasses, heavy duty.
- Good Insulation property: cyclopentane foaming, eco-friendly.
- We use molds for foaming, which is done automatically in a one-time process without manual operation. This ensures better insulation performance.
- 220V/50Hz; 110V/60Hz
- Inner with four layers PVC coating shelves
- Universal TPR wheels, two with brakes.
- Each door has vertical LED light strips with good quality to illuminate the merchandise excellently

TECHNICAL INFORMATION 技术参数

Model	Size(mm)	Net Capacity(L)	Cooling	Temperature	Shape	Color	Doors
VGD-1B	680x560x1940	400L	Ventilated	2°C~8°C	Vertical	Black/White	1
VGD-1B	680x660x1940	510L	Ventilated	2°C~8°C	Vertical	Black/White	2
VGD-2B	1175x640x2020	900L	Ventilated	2°C~8°C	Vertical	Black/White	2
VGD-3B	1830x740x2020	1550L	Ventilated	2°C~8°C	Vertical	Black/White	3



DISPLAY CHILLER & FREEZER 玻璃展示冷藏柜/冷冻柜

This display chiller/freezer is used to showcase a variety of frozen goods such as pastries, meat, seafood, and other food that need to be stored at low temperatures.

An upright glass door display freezer is a type of commercial refrigeration equipment commonly used in grocery stores, convenience stores, supermarkets and other retail environments.

Model Features:

- ▣ Glasses: tempered glasses, Self-closing doors
- ▣ Good Insulation property: cyclopentane foaming, eco-friendly
- ▣ 220V/50Hz; 110V/60Hz
- ▣ Ventilated, Donper or Scope Compressor, R290/R404a
- ▣ Automatic Defrost
- ▣ PVC doors
- ▣ Inner with four layers PVC coating shelves
- ▣ Universal TPR wheels, two with brakes.
- ▣ Each door has vertical LED light strips with good quality to illuminate the merchandise excellently

TECHNICAL INFORMATION 技术参数

Model	Size(mm)	Packing Size(mm)	Cooling	Temperature	Shape	Color	Doors
VDC-390	580×660×1940	620×700×1990	Ventilated	1°C~10°C	Vertical	Black/White	1
VDC-420	680×560×1940	720×600×1990	Ventilated	1°C~10°C	Vertical	Black/White	1
VDC-520	680×660×1940	720×700×1990	Ventilated	1°C~10°C	Vertical	Black/White	1
VDC-900	1050×660×2020	1090×700×2070	Ventilated	1°C~10°C	Vertical	Black/White	2
VDC-1200	1215×740×2020	1250×780×2070	Ventilated	1°C~10°C	Vertical	Black/White	2
VDC-1300	1370×740×2020	1410×780×2070	Ventilated	1°C~10°C	Vertical	Black/White	2

DISPLAY CHILLER AND DISPLAY FREEZER CUSTOMIZABLE OPTIONS


玻璃展示冷藏柜和玻璃展示冷藏柜/冷冻柜可定制选项



COLOR



COMPRESSOR BRAND

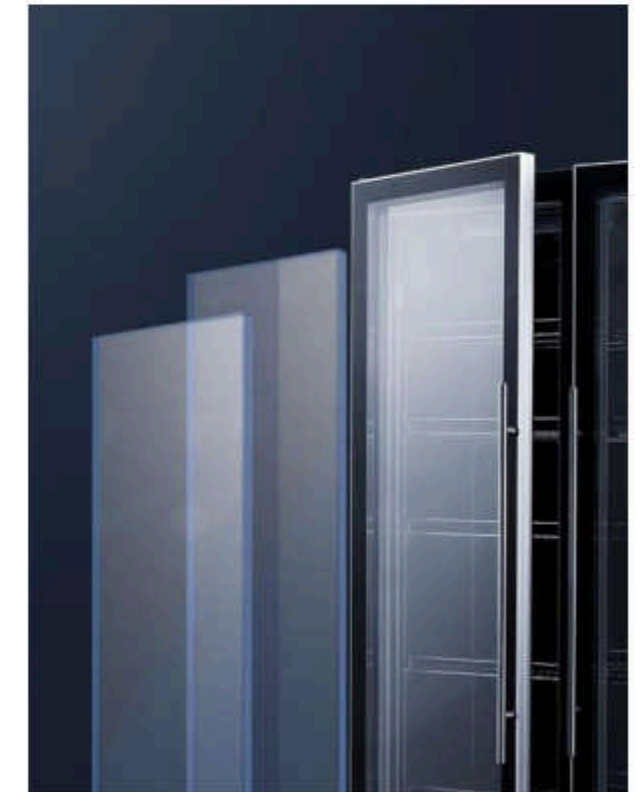

HEATING WIRE GLASSES

GLASS DOOR FRIDGE
玻璃门展示柜



Volume Max

TECHNICAL INFORMATION 技术参数

Model	Size(mm)	G. Capacity(L)	Cooling	Temperature	Shape	Color	Doors
VDC-700	700x605x1965	455L	Ventilated	2°C~8°C	Vertical	Black/White	1
VDC-1120	1120x605x1965	770L	Ventilated	2°C~8°C	Vertical	Black/White	2
VDC-1680	1720x605x1965	1195L	Ventilated	2°C~8°C	Vertical	Black/White	3

OPENDISPLAY FRIDGE
风幕柜



TECHNICAL INFORMATION 技术参数

Model	型号	ODF-180L	ODF-220L
External Dimension(mm) WxDxH	外形尺寸	494x677x1455	494x677x1744
Packing Dimension(mm) WxDxH	包装尺寸	565x720x1630	565x720x1920
Temperature(°C)	温度	+1~+8	+1~+8
input power (w)	输入功率	1340W	1340W
Gross weight (kg)	毛重	90KG	106KG
Qty Of Shelves	货架数量	3	3
Capacity (L)	容量	180	220

OPEN DISSPLAY FRIDGE
开放式冰箱



Model Features:

- ◉ Stainless steel materials
- ◉ Cold Air curtain from top side, block the outside air effectively
- ◉ Transparent curtain to use at night, save energy and keep the temperatureVentilated Cooling
- ◉ Four heavy-duty wheels, two with brakes
- ◉ LED Light under each shelf to illuminate the displays
- ◉ Branded Compressor, R290 Refrigerant
- ◉ Cupreous Condensate and Evaporator

TECHNICAL INFORMATION 技术参数

Model	型号	ODF-90	ODF-120	ODF-150
External Dimension(mm) WxDxH	外形尺寸	900x700x1400 900x700x1800	1200x700x1400 1200x700x1800	1500x700x1400 1500x700x1800
Packing Dimension(mm) WxDxH	包装尺寸	940x740x1540	1240x740x1540	1540x740x1540
Temperature(°C)	温度	+1~+8	+1~+8	+1~+8
input power (w)	输入功率	550W	730W	950W
Gross weight (kg)	毛重	130KG	150KG	180KG
Qty Of Shelves	货架数量	2/4	2/4	2/4

01

ICE CREAM FREEZER

冰淇淋展示柜

Gelato is a popular Italian frozen dessert that is similar to ice cream but has a denser and creamier texture.

A Gelato freezer is critically necessary for your store to showcase the Gelato. The dual air duct circulation system ensures a more even distribution of cold air inside the refrigerator, resulting in a more stable temperature.

► **Glasses:**
double layers tempered glasses, heating wire to prevent the fogging

► **Aluminum door frame**

► **Good Insulation property:**
cyclopentane foaming, eco-friendly.

► **Pans:**
stainless steel 1/3 GN Pans are included.



► **Refrigeration:**
ventilated, Donper or Scope Compressor, R290/R404a, Completely cuperous condensate and evaporator.

► **Lights LED:**
Good quality LED light strips to illuminate the Gelato excellently

► **Automatic Defrost:**
Reverse cycle defrosting


► **Basement:**
MDF board+steel, luxury appearance and durable quality.

► **Controller:**
Italy Dixell or Elitech brand temperature Controller

► **Wheels:**
Universal TPR wheels, two with brakes.

BEVEL ICE CREAM FREEZER 斜款冰淇淋展示柜

C GFA-C

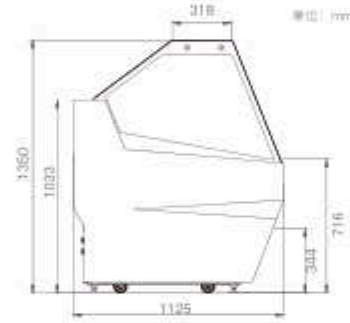


- Famous Brand Compressor 进口制冷机组
- Double Air Flow 双风道制冷循环
- Hollow Tempered Defogging Glass 中空钢化除雾玻璃
- Inclined Glass Design 斜面玻璃设计

Model 型号	GFA-C8	GFA-C12	GFA-C16	GFA-C18
External Dimension(mm) 外形尺寸 W×D×H	980×1125×1350	1247×1125×1350	1577×1125×1350	1742×1125×1350
Temperature(°C) 温度	-18°C~-16°C			
Cooling system 制冷方式	Ventilated			
Defrosting 除霜方式	Cycle reverse defrosting			
Voltage/Frequency 电压/频率	220~240V/50Hz			
Input power (w) 输入功率	1200	1350	1520	1650
Net weight (kg) 净重	290	370	430	440
Gross weight (kg) 毛重	250	330	485	545
GN1/3 pan (325×176×100h) G/N 1/3 盆	8	12	16	18
GN1/2 pan (325×265×65/100h) G/N 1/2 盆	6	8	10	12
Italian pan (360×165×120h) 意大利盆	8	12	16	18
Round barrel 圆桶	6	8	10	12

CURVED ICE CREAM FREEZER 弧形冰淇淋展示柜

P GFC-P




- Famous Brand Compressor 进口制冷机组
- Double Air Flow 双风道制冷循环
- Hollow Tempered Defogging Glass 中空钢化除雾玻璃

Model 型号	GFC-P7	GFC-P9	GFC-P19
External Dimension(mm) 外形尺寸 W×D×H	1056×885×1300	1256×885×1310	2256×885×1300
Temperature(°C) 温度	-18°C~-16°C		
Cooling system 制冷方式	Ventilated		
Defrosting 除霜方式	Cycle reverse defrosting		
Voltage/Frequency 电压/频率	220~240V/50Hz		
Input power (w) 输入功率	1050	1200	/
Net weight (kg) 净重	230	270	380
Gross weight (kg) 毛重	250	295	395
GN1/3 pan (325×176×100h) G/N 1/3 盆	7	9	19

LINEAR ICE CREAM FREEZER
直角冰淇淋展示柜

R GFA-R

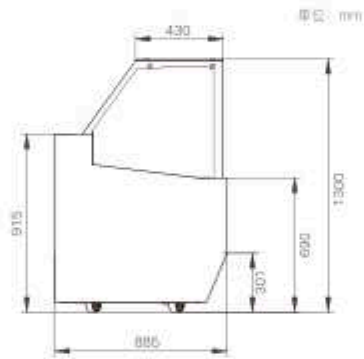

D GFB-D



- Famous Brand Compressor
进口制冷机组
- Double Air Flow
双风道制冷循环
- Hollow Tempered Defogging Glass
中空钢化除雾玻璃

Model	型号	GFA-R10		GFA-R12
External Dimension(mm) W×D×H	外形尺寸	1056×885×1300		1256×885×1300
Temperature(°C)	温度	-18°C~-16°C		
Cooling system	制冷方式	Ventilated		
Defrosting	除霜方式	Cycle reverse defrosting		
Voltage/Frequency	电压/频率	220~240V/50Hz		
Input power (w)	输入功率	1050		1200
Net weight (Kg)	净重	230		285
Gross weight (Kg)	毛重	250		305
GN1/3 pan (325×176×100h)	G/N 1/3 盘	7		9

- Famous Brand Compressor
进口制冷机组
- Double Air Flow
双风道制冷循环
- Hollow Tempered Defogging Glass
中空钢化除雾玻璃

Model	型号	GFB-D6		GFB-D9
External Dimension(mm) W×D×H	外形尺寸	1300×750×1270		1770×750×1270
Temperature(°C)	温度	-18°C~-16°C		
Cooling system	制冷方式	Ventilated		
Defrosting	除霜方式	Cycle reverse defrosting		
Voltage/Frequency	电压/频率	220~240V/50Hz		
Input power (w)	输入功率	1050		1150
Net weight (Kg)	净重	200		260
Gross weight (Kg)	毛重	220		280
GN1/3 pan (325×176×100h)	G/N 1/3 盘	6		9

D ICDW



- Famous Brand Compressor
进口制冷机组
- Double Air Flow
双风道制冷循环
- Hollow Tempered Defogging Glass
中空钢化除雾玻璃

TECHNICAL INFORMATION 技术参数

Model 型号	ICDW-10	ICDW-12	ICDW-14	ICDW-16
External Dimension(mm) 外形尺寸 W×D×H	1000×1050×1350	1300×1050×1350	1500×1050×1350	1700×1050×1350
Temperature(°C) 温度	-18°C~-16°C			
Cooling system 制冷方式	Ventilated			
Defrosting 除霜方式	Electric heating defrosting			
Voltage/Frequency 电压/频率	220~240V/50Hz			
Input power (w) 输入功率	950	1060	1260	1350
Net weight (kg) 净重	160	200	220	240
Gross weight (kg) 毛重	180	220	245	265
GN1/3 pan (325×176×100h) GN 1/3 盘	10	12	14	16

D ICD



- Famous Brand Compressor
进口制冷机组
- Double Air Flow
双风道制冷循环
- Hollow Tempered Defogging Glass
中空钢化除雾玻璃

TECHNICAL INFORMATION 技术参数

Model 型号	ICDW-10	ICDW-12	ICDW-14	ICDW-16	ICDW-18	ICDW-20	ICDW-22
External Dimension(mm) 外形尺寸 W×D×H	1030×1030 ×1250	1200×1030 ×1250	1370×1030 ×1250	1530×1030 ×1250	1700×1030 ×1250	1860×1030 ×1250	2030×1030 ×1250
Temperature(°C) 温度	-18°C~-16°C						
Cooling system 制冷方式	Ventilated						
Defrosting 除霜方式	Electric heating defrosting						
Voltage/Frequency 电压/频率	220~240V/50Hz						
Input power (w) 输入功率	680	750	850	980	1100	1250	1450
Net weight (kg) 净重	158	175	199	218	235	259	295
Gross weight (kg) 毛重	178	195	220	243	260	289	325
GN1/3 pan (325×176×100h) GN 1/3 盘	10	12	14	16	18	20	22

S GFSS



Famous Brand Compressor
进口制冷机组



Double Air Flow
双风道制冷循环



Hollow Tempered Defogging Glass
中空钢化除雾玻璃

TECHNICAL INFORMATION 技术参数

Model 型号	GFSS-10	GFSS-12	GFSS-14	GFSS-16	GFSS-18	GFSS-20	GFSS-24
External Dimension (mm) 外形尺寸 W×D×H	1030×1030 ×1250	1200×1030 ×1250	1370×1030 ×1250	1530×1030 ×1250	1700×1030 ×1250	1860×1030 ×1250	2200×1030 ×1250
Temperature (°C) 温度	-18°C~-16°C						
Cooling system 制冷方式	Ventilated						
Defrosting 除霜方式	Electric heating defrosting						
Voltage/Frequency 电压/频率	220~240V/50Hz						
Input power (w) 输入功率	680	750	850	980	1100	1250	1750
Net weight (kg) 净重	138	150	169	188	205	224	260
Gross weight (kg) 毛重	158	170	189	208	230	249	285
GN1/3 pan (325×176×100h) G/N 1/3 盆	10	12	14	16	18	20	24

V GN-RV



Model Features:

1. Brilliant internal LED on top
2. Digital temperature controller and display
3. Ice-cream pans
4. 4 sides double-tempered glass
5. Electric heating film defogging
6. Sliding doors at back
7. 4 Casters
8. Ventilated cooling system Automatic defrost
9. Hot air at front and 2 side to remove water on glass
10. Condensation water evaporated automatically

Option

Other color: steel
Decorative pattern
100-115V/60Hz

TECHNICAL INFORMATION 技术参数

Model 型号	GN-RV6	GN-RV7	GN-RV8	GN-RV9	GN-RV12	GN-RV14	GN-RV16	GN-RV18
External Dimension (mm) 外形尺寸 W×D×H	1260×740 ×1373	1435×740 ×1373	1610×740 ×1373	1785×740 ×1373	1260×1045 ×1373	1435×1045 ×1373	1610×1045 ×1373	1785×1045 ×1373
Temperature (°C) 温度	-18°C~-16°C							
Cooling system 制冷方式	Ventilated							
Defrosting 除霜方式	Cycle reverse defrosting							
Refrigerant 制冷剂	R404a							
Voltage/Frequency 电压/频率	220~240V/50Hz							
Input power (w) 输入功率	1100	1160	1180	1200	1200	1260	1280	1300
GN1/3 pan (325×176×100h) G/N 1/3 盆	6	7	8	9	12	14	16	18

ICE POPSICLE FREEZER 冰棍展示柜



STATIC COOLING

Model Features:

1. An economic ice popsicle freezer
2. This freezer features non-fog glass doors, heating wire glasses won't have fog to effect the clear view of the ice pops
3. Acrylic boxes or stainless steel pans for different displays
4. Good quality LED lights to illuminate the displays and the basement
5. Customized advertising sticker is available

TECHNICAL INFORMATION 技术参数

Model 型号	IPF-6	ICP-10	ICP-12	ICP-14
External Dimension(mm) 外形尺寸 W×D×H	640×810×900	970×810×970	1140×810×900	1390×810×900
Temperature(°C) 温度	-20°C~-16°C			
Cooling system 制冷方式	Static			
Defrosting 除霜方式	Automatic			
Voltage/Frequency 电压/频率	220~240V/50Hz			
Input power (W) 输入功率	200	260	300	350
Qty of GN pan (260×160×100mm) 份数盘	6	10	12	14

STATIC COOLING ICE CREAM FREEZER 直冷冰淇淋展示柜



STATIC COOLING

Model Features:

1. An economic ice cream showcase
2. This showcase is a good choice to showcase ice popsicle
3. The large glass doors offer an excellent view of your ice popsicles and ice cream.
4. The transparent front design offer more visual window for consumers
5. Acrylic boxes or stainless steel pans for choices
6. We have three different sizes with different pans for choice in the chart below

TECHNICAL INFORMATION 技术参数

Model 型号	ICS-6	ICS-10	ICS-12
External Dimension(mm) 外形尺寸 W×D×H	710×680×970	1000×680×970	1200×680×970
Temperature(°C) 温度	-20°C~-16°C		
Cooling system 制冷方式	Static		
Defrosting 除霜方式	Automatic		
Voltage/Frequency 电压/频率	220~240V/50Hz		
Input power (W) 输入功率	130	210	240
Qty of GN pan (260×160×100mm) 份数盘	6	10	12

STATIC COOLING BEVEL ICE CREAM FREEZER
直冷斜款冰淇淋展示柜



STATIC COOLING CURVED ICE CREAM FREEZER
直冷弧形冰淇淋展示柜



TECHNICAL INFORMATION 技术参数

Model 型号	ICSB-10	ICSB-12	ICSB-16
External Dimension(mm) 外形尺寸 W×D×H	985×835×1290	1230×835×1290	1540×835×1290
Temperature(°C) 温度	-20°C~-16°C		
Cooling system 制冷方式	Static		
Defrosting 除霜方式	Manual		
Voltage/Frequency 电压/频率	220~240V/50Hz		
Input power (w) 输入功率	220	280	280
Qty of GN pan 份数盘	10	12	16
Qty Of Barrels (220×135mm) 圆桶	6	8	10

TECHNICAL INFORMATION 技术参数

Model 型号	ICSC-10	ICSC-12	ICSC-14
External Dimension(mm) 外形尺寸 W×D×H	970×810×900+460	1140×810×900+460	1390×810×900+460
Temperature(°C) 温度	-20°C~-16°C		
Cooling system 制冷方式	Static		
Defrosting 除霜方式	Automatic		
Voltage/Frequency 电压/频率	220~240V/50Hz		
Input power (w) 输入功率	270	370	430
Qty of GN pan 份数盘	10	12	14
Qty Of Barrels (220×135mm) 圆桶	6	8	10

STATIC COOLING CURVED ICE CREAM FREEZER
直冷弧形冰淇淋展示柜

S SDSS



Famous Brand Compressor
进口制冷机组



Double Air Flow
双风道制冷循环



Hollow Tempered Defogging Glass
中空钢化除雾玻璃

N SDSN



Famous Brand Compressor
进口制冷机组



Double Air Flow
双风道制冷循环



Hollow Tempered Defogging Glass
中空钢化除雾玻璃

Model	型号	SD228SS	SD328SS	SD428SS	SD528SS	SD628SS
External Dimension(mm) W×D×H	外形尺寸	840×830×1285	1085×830×1285	1360×830×1285	1705×830×1285	1910×830×1285
Packing Size(mm)	包装尺寸	940×840×1330	1185×840×1330	1430×840×1330	1805×840×1330	2010×840×1330
Capacity(L)	有效容积	205	285	370	480	545
Temperature(°C)	温度范围	-25°C~-18°C				
Cooling System	制冷方式	Static				
Refrigerant	制冷剂	R290				
Input Power(W)	额定功率	285	310	310	370	370
Qty of 5L SS Pans	5L冰淇淋盆	4	6	9	12	13
Qty of Glass Door	玻璃门数量	2	2	2	2	2
Rear door	后开门	/	/	Optional	Optional	Optional
Glass-covered acrylic door	玻璃罩亚克力门	Optional	Optional	Optional	Optional	Optional
Net Weight(kg)	净重	45	75	90	108	122
Gross Weight(kg)	毛重	59	90	105	125	145

Model	型号	SD228SN	SD328SN	SD428SN	SD528SN	SD628SN
External Dimension(mm) W×D×H	外形尺寸	840×720(830) ×1170	1085×720(830) ×1170	1360×720(830) ×1170	1705×720(830) ×1170	1910×720(830) ×1285
Packing Size(mm)	包装尺寸	940×840×1330	1185×840×1330	1430×840×1330	1805×840×1330	2010×840×1330
Capacity(L)	有效容积	205	285	370	480	545
Temperature(°C)	温度范围	-25°C~-18°C				
Cooling System	制冷方式	Static				
Refrigerant	制冷剂	R290				
Input Power(W)	额定功率	285	310	310	370	370
Qty of 5L SS Pans	5L冰淇淋盆	3	6	9	12	13
Qty of Glass Door	玻璃门数量	2	2	2	2	2
Rear door	后开门	/	/	Optional	Optional	Optional
Net Weight(kg)	净重	45	75	90	108	122
Gross Weight(kg)	毛重	59	90	105	125	145

MINI ICE CREAM FREEZER 迷你冰淇淋展示柜



Ideal ice cream freezer for small shop or convenience stores, it could be placed on the counter before customer check out, which will attract customer to buy especially in summer season.

Model Features:

- Glasses: Hovering glass doors, electrical heating wire, non-fogging up
- Good Insulation property: cyclopentane foaming, eco-friendly.
- Refrigeration: Static, R290 refrigerant, Completely cuperous condensate and evaporator.
- Automatic Defrost: Reverse cycle defrosting
- Aluminum door frame
- Pans: various of stainless steel GN Pans for options.
- Lights LED: Good quality LED light strips to illuminate the Gelato excellently

TECHNICAL INFORMATION 技术参数

Model	型号	GFMI-3
External Dimension(mm) W×D×H	外形尺寸	655×740×370
Temperature(°C)	温度	-22°C~-18°C
Cooling system	制冷方式	STATIC
Defrosting	除霜方式	MANUAL
Voltage/Frequency	电压/频率	220~240V/50HZ
Input Power (w)	输入功率	230
GN1/3 pan (325×176×100h)	GN1/3 盆	3

01 Kitchen Refrigeration



Upright Fridge VENTILATED 650 SERIES



650TN

Features

- European Fashionable style upright cabinet chiller
- Interior and exterior stainless steel AISI304 material for high level product
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell

- High quality compressor: Danfoss, Embraco
- LED light
- Germany Well-known brand EBM fans
- Compatible for GN2/1 Shelves
- Automatic defrost cooling system
- Replaceable door center sill with heating elements
- CFC free with 60mm super thickness
- Three layers of gray coated shelves per door as standard

Options

- Adjustable feet or Caster wheels

Upright Fridge VENTILATED GN650 SERIES



650TNG



650BTM

Product Model	650TN/TNG	650BT/BTG	650TNM/TNMG	650BTM/BTMG
Unit dimensions (W/D/H mm)	740*830*2010	740*830*2010	740*830*2010	740*830*2010
Net capacity (L)	650	650	650	650
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	3	3	3	3
Interior light	LED light	LED light	LED light	LED light
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290	R134a/R290	R404a/R290
40' Container loading	40	40	40	40

Upright Fridge

VENTILATED 1300 SERIES



1300BT

Features

- Two full size S/S door cabinet freezer
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 6 adjustable GN2/1 Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels

Upright Fridge

VENTILATED 1300 SERIES



1300TNM



1300TNG

Product Model	1300TN/TNG	1300BT/BTG	1300TNM/TNMG	1300BTM/BTMG
Unit dimensions (W/D/H mm)	1480*830*2010	1480*830*2010	1480*830*2010	1480*830*2010
Net capacity (L)	1300	1300	1300	1300
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Embraco	Secop/Secop	Embraco
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R404a	R134a/R290	R404a
40 ' Container loading	15	15	15	15

Upright Fridge

VENTILATED 700mm DEPTH



580TN

Features

- European Fashionable style upright cabinet chiller
- Interior and exterior stainless steel AISI304 material for high level product
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality compressor: Danfoss, Embraco
- LED light
- Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Replaceable door center sill with heating elements
- CFC free with 60mm super thickness
- Three layers of gray coated shelves per door as standard

Options

- Adjustable feet or Caster wheels

Product Model	580TN	580BT
Unit dimensions (W/D/H mm)	740*730*2010	740*730*2010
Net capacity (L)	580	580
Cooling system	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22
Shelves No.	3	3
Interior light	LED light	LED light
Compressor	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290
40' Container loading	45	45

Upright Fridge

VENTILATED 700mm DEPTH



1180BT

Features

- Two full size S/S door cabinet freezer
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 6 adjustable Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels

Product Model	1180TN	1236TN	1180BT	1236BT
Unit dimensions (W/D/H mm)	1480*730*2010	1480*810*2010	1480*730*2010	1480*810*2010
Net capacity (L)	1180	1236	1180	1236
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-2~+10	-18~-22	-18~-22
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Embraco/Secop	Secop	Embraco/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R290	R404a/R290	R404a/R290
40' Container loading	22	22	22	22

Upright Fridge

VENTILATED 700mm DEPTH



580TN

Features

- European Fashionable style upright cabinet chiller
- Interior and exterior stainless steel AISI304 material for high level product
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality compressor: Danfoss, Embraco
- LED light
- Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Replaceable door center sill with heating elements
- CFC free with 60mm super thickness
- Three layers of gray coated shelves per door as standard

Options

- Adjustable feet or Caster wheels

Product Model	580TN	580BT
Unit dimensions (W/D/H mm)	740*730*2010	740*730*2010
Net capacity (L)	580	580
Cooling system	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22
Shelves No.	3	3
Interior light	LED light	LED light
Compressor	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290
40' Container loading	45	45

Upright Fridge

VENTILATED 700mm DEPTH



1180BT

Features

- Two full size S/S door cabinet freezer
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 6 adjustable Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels

Product Model	1180TN	1236TN	1180BT	1236BT
Unit dimensions (W/D/H mm)	1480*730*2010	1480*810*2010	1480*730*2010	1480*810*2010
Net capacity (L)	1180	1236	1180	1236
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-2~+10	-18~-22	-18~-22
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Embraco/Secop	Secop	Embraco/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R290	R404a/R290	R404a/R290
40' Container loading	22	22	22	22

Upright Fish Refrigerator VENTILATED FISH COOLER



600TNF

Features

- One full size S/S solid door Cabinet fish cooler
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- 7 layers of pan inside
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels
- Heating element for door frame



Product Model	600TNFISH	600TNVFISH	600TNGVFISH
Unit dimensions (W/D/H mm)	680*810*2010	680*810*2010	680*810*2010
Net capacity (L)	600	600	600
Cooling system	Static with fan cooling	Ventilated	Ventilated
Temperature (°C)	0~+10	0~+10	0~+10
Shelves No.	7 layers of pan	7 layers of pan	7 layers of pan
Interior light	LED light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Eliwell/Dixell	Eliwell/Dixell	Eliwell/Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	42	42	42

Upright Fridge 600 SERIES



600TN



600TNG

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- 3 adjustable GN2/1 Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels
- Heating element for door frame

Product Model	600TN	600TNM	600TNGM	600TNG
Unit dimensions (W/D/H mm)	680*810*2010	680*810*2010	680*810*2010	680*810*2010
Net capacity (L)	600	600	600	600
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10	0~+10
Shelves No.	3	3	3	3
Interior light	LED light	LED light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	42	42	42	42

Upright Fish Refrigerator VENTILATED FISH COOLER



600TNF

Features

- One full size S/S solid door Cabinet fish cooler
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- 7 layers of pan inside
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels
- Heating element for door frame



Product Model	600TNFISH	600TNVFISH	600TNGVFISH
Unit dimensions (W/D/H mm)	680*810*2010	680*810*2010	680*810*2010
Net capacity (L)	600	600	600
Cooling system	Static with fan cooling	Ventilated	Ventilated
Temperature (°C)	0~+10	0~+10	0~+10
Shelves No.	7 layers of pan	7 layers of pan	7 layers of pan
Interior light	LED light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Eliwell/Dixell	Eliwell/Dixell	Eliwell/Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	42	42	42

Upright Fridge 600 SERIES



600TN



600TNG

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- 3 adjustable GN2/1 Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels
- Heating element for door frame

Product Model	600TN	600TNM	600TNGM	600TNG
Unit dimensions (W/D/H mm)	680*810*2010	680*810*2010	680*810*2010	680*810*2010
Net capacity (L)	600	600	600	600
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10	0~+10
Shelves No.	3	3	3	3
Interior light	LED light	LED light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	42	42	42	42

Upright Fridge VENTILATED 600 SERIES



600TNV

600BTMV

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 3 adjustable GN2/1 Shelves
- CFC free foaming

Options

- Adjustable feet or Caster wheels

Product Model	600TNV/ 600TNGV	600BTV	600TNMV	600BTMV
Unit dimensions (W/D/H mm)	680*810*2010	680*810*2010	680*810*2010	680*810*2010
Net capacity (L)	600	600	600	600
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	3	3	3	3
Interior light	LED light	LED light	LED light	LED light
Compressor	ZEL/ZEL	Embraco/Secop	ZEL/ZEL	Embraco/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290
40' Container loading	42	42	42	42

Upright Fridge 1200 SERIES



1200TN

1200BTG

Features

- Int&Ext material stainless steel
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- 6 adjustable GN2/1 Shelves
- CFC free foaming
- Auto defrosting and evaporation of condensation
- Self-closing door

Options

- Adjustable feet or Caster wheels

Product Model	1200TN	1200TNM	1200TNG	1200BTG
Unit dimensions (W/D/H mm)	1340*810*2010	1340*810*2010	1340*810*2010	1340*810*2010
Net capacity (L)	1200	1200	1200	1200
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10	-12~-16
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Secop/Secop	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Eliwell/Dixell	Eliwell/Dixell
Kind of coolant	R134a/R290	R134a/R290	R134a/R290	R134a/R290
40' Container loading	22	22	22	22

Upright Fridge VENTILATED 1200 SERIES



1200TNV



1200TNMV

Features

- Int&Ext material stainless steel
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 6 adjustable GN2/1 Shelves
- CFC free foaming
- Auto defrosting and evaporation of condensation
- Self-closing door

Options

- Adjustable feet or Caster wheels

Product Model	1200TNV	1200BTV	1200TNMV	1200BTMV
Unit dimensions (W/D/H mm)	1340*810*2010	1340*810*2010	1340*810*2010	1340*810*2010
Net capacity (L)	1200	1200	1200	1200
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Secop	Secop/Secop	Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290	R134a/R290	R404a/R290
40' Container loading	22	22	22	22

Upright Fridge SNACK400 SERIES



SNACK-400TN



SNACK-400BTM

Features

- Int&Ext material stainless steel
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- CFC free foaming
- 60mm insulation thickness
- Self-closing door

Options

- Adjustable feet or Caster wheels

Product Model	SNACK-400TN	SNACK-400TNM
Unit dimensions (W/D/H mm)	680*710*2010	680*710*2010
Net capacity (L)	429	429
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	3	3
Interior light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a
40' Container loading	48	48

Upright Fridge SNACK400E SERIES



400ETN

400ETNG

Features

- Bottom Engine Room
- Int&Ext material stainless steel
- Revisable self-closing door
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- CFC free foaming
- 60mm insulation thickness
- Auto defrosting and evaporation of condensation
- Self-closing door

Options

- Adjustable feet or Caster wheels
- Heating element for door frame

Product Model	SNACK-400ETN	SNACK400ETNG
Unit dimensions (W/D/H mm)	680*710*2010	680*710*2010
Net capacity (L)	429	429
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	3	3
Interior light	LED light	LED light
Compressor	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a
40' Container loading	48	48

Upright Fridge VENTILATED SNACK400 SERIES



400TNV

400BTMV

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- CFC free foaming
- 60mm insulation thickness
- Self-closing door

Options

- Adjustable feet or Caster wheels

Product Model	SNACK-400TNV/ SNACK-400TNGV	SNACK-400BTV	SNACK- 400TNMV	SNACK- 400BTMV
Unit dimensions (W/D/H mm)	680*710*2010	680*710*2010	680*710*2010	680*710*2010
Net capacity (L)	429	429	429	429
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~22	-2~+10	-18~22
Shelves No.	3	3	3	3
Interior light	LED light	LED light	LED light	LED light
Compressor	ZEL/ZEL	Embraco/Secop	ZEL/ZEL	Embraco/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290
40' Container loading	48	48	48	48

Upright Fridge 1065 SERIES



1065TN

1065BTG

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- With Temper glass door
- Digital thermostat
- With lock and key
- LED light
- Fan cooling system
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels

Product Model	1065TN	1065TNG
Unit dimensions (W/D/H mm)	1340*710*2010	1340*710*2010
Net capacity (L)	1065	1065
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	6	6
Interior light	LED light	LED light
Compressor	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R290
40' Container loading	25	25

Upright Fridge VENTILATED 1065 SERIES



1065TNV

1065TNMV

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels
- Defrost heating tube for evaporator

Product Model	1065TNV	1065BTV	1065TNMV	1065BTMV
Unit dimensions (W/D/H mm)	1340*710*2010	1340*710*2010	1340*710*2010	1340*710*2010
Net capacity (L)	1065	1065	1065	1065
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	6	6	6	6
Interior light	LED light	LED light	LED light	LED light
Compressor	Secop/Secop	Secop	Secop/Secop	Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290	R134a/R290	R404a/R290
40' Container loading	25	25	25	25

Bakery Refrigerator VENTILATED BAKERY SERIES



BR-800TN

Features

- One full size S/S solid door bakery cabinet chiller
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 10 adjustable Bakery 600*800 pan Support
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels

Product Model	BR-800TN	BR-800BT
Unit dimensions (W/D/H mm)	740*990*2010	740*990*2010
Net capacity (L)	737	737
Cooling system	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22
Interior light	LED light	LED light
Compressor	Secop/Secop	Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290
40 ' Container loading	33	33

Bakery Refrigerator VENTILATED BAKERY SERIES



GE-800BT

Features

- One full size S/S solid door bakery cabinet freezer
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- With lock and key
- LED light
- Ventilated cooling
- Automatic defrost
- 10 adjustable Bakery 600*800 Shelves, no GN pans
- CFC free foaming
- 60mm insulation thickness

Options

- Adjustable feet or Caster wheels

Product Model	GE-800TN	GE-800BT
Unit dimensions (W/D/H mm)	740*990*2010	740*990*2010
Net capacity (L)	737	737
Cooling system	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22
Shelves No.	/	10
Interior light	LED light	LED light
Compressor	Secop/Secop	Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R404a/R290
40 ' Container loading	33	33

COUNTER REFRIGERATOR



4180TN

Features

- European Fashionable style counter chiller/freezer
- Inside and outside stainless steel 304 material for high level product
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Eliwell, Dixell, Carel
- High quality famous compressor: Danfoss, Embraco,
- Fans: Germany Well-known brand EBM fans
- Compatible for GN1/1 Shelves
- Automatic defrost cooling system
- Replaceable door center sill with heating elements
- CFC free with 60mm super thickness
- One layer of gray coated shelves per door as standard
- Adjustable stainless steel feet or lockable castors
- Special various front panel design according to customer request
- Optional glass doors/with GN1/3, GN2/3, GN1/2 Drawers/ SS 201 material/lock and key / internal light/engine room drawer/with splashback

COUNTER FREEZER
VENTILATED GN SERIES

2100TN



3100TN



4100BT

Features

- Int&Ext material stainless steel
- Reversible self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- With GN1/3, GN2/3, GN1/2 Drawers
- Internal LED light

Product Model	2100TN	2100BT	3100TN	3100BT	4100TN	4100BT
Unit dimensions (W/D/H mm)	1360*700*860	1360*700*860	1795*700*860	1795*700*860	2230*700*860	2230*700*860
Net capacity (L)	282	282	417	417	553	553
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	2	2	3	3	4	4
Interior light	Option	Option	Option	Option	Option	Option
Compressor	ZEL/ZEL	Secop/Secop	ZEL/ZEL	Secop/Secop	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290	R134a/R290	R404a/R290
40' Container loading	48	48	38	38	32	32

COUNTER REFRIGERATOR VENTILATED SERIES



4200BT



2200TN

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- with GN1/3, GN2/3, GN1/2 Drawers
- Internal LED light

Product Model	2200TN	2200BT	3200TN	3200BT	4200TN	4200BT
Unit dimensions (W/D/H mm)	1360*700*950	1360*700*950	1795*700*950	1795*700*950	2230*700*950	2230*700*950
Net capacity (L)	282	282	417	417	553	553
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	2	2	3	3	4	4
Interior light	Option	Option	Option	Option	Option	Option
Compressor	ZEL/ZEL	Secop/Secop	ZEL/ZEL	Secop/Secop	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290	R134a/R290	R404a/R290
40' Container loading	48	48	38	38	32	32

COUNTER REFRIGERATOR VENTILATED SERIES



2100TNG



3100TNG



4200BTG

Features

- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Interior light
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- with GN1/3, GN2/3, GN1/2 Drawers
- Internal LED light

Product Model	2100TNG	2100BTG	3100TNG	3100BTG	4100TNG	4100BTG
Unit dimensions (W/D/H mm)	1360*700*860	1360*700*860	1795*700*860	1795*700*860	2230*700*860	2230*700*860
Net capacity (L)	282	282	417	417	553	553
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	2	2	3	3	4	4
Interior light	Yes	Yes	Yes	Yes	Yes	Yes
Compressor	ZEL/ZEL	Secop/Secop	ZEL/ZEL	Secop/Secop	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290	R134a/R290	R404a/R290
40' Container loading	48	48	38	38	32	32

COUNTER REFRIGERATOR VENTILATED SNACK SERIES



SNACK-2100TN



SNACK-3100TN



SNACK-4100BT

Features

- Snackcounter with 600mm depth
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- with GN1/3, GN2/3, GN1/2 Drawers
- Internal LED light

Product Model	SNACK-2100TN	SNACK-2100BT	SNACK-3100TN	SNACK-3100BT	SNACK-4100TN	SNACK-4100BT
Unit dimensions (W/D/H mm)	1360*600*850	1360*600*850	1795*600*850	1795*600*850	2230*600*850	2230*600*850
Net capacity (L)	228	228	339	339	449	449
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-18~-22	-2~+10	-18~-22	-2~+10	-18~-22
Shelves No.	2	2	3	3	4	4
Interior light	Option	Option	Option	Option	Option	Option
Compressor	ZEL/ZEL	Secop/Secop	ZEL/ZEL	Secop/Secop	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R404a/R290	R134a/R600a	R404a/R290	R134a/R290	R404a/R290
40' Container loading	48	48	38	38	32	32

COUNTER REFRIGERATOR VENTILATED SNACK SERIES



SNACK-2100TNG



SNACK-3100TNG



SNACK-4100TNG

Features

- Snackcounter with 600mm depth
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Interior light
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- with GN1/3, GN2/3, GN1/2 Drawers
- Internal LED light
- Lock and key
- With Splashback

Product Model	SNACK-2100TNG	SNACK-3100TNG	SNACK-4100TNG
Unit dimensions (W/D/H mm)	1360*600*850	1795*600*850	2230*600*850
Net capacity (L)	228	339	449
Cooling system	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-2~+10	-2~+10
Shelves No.	2	3	4
Interior light	Yes	Yes	Yes
Compressor	ZEL/ZEL	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R404a/R290
40' Container loading	48	38	32

BAKERY COUNTER

VENTILATED BAKERY COUNTER



BC-2100TN



BC-3100TN

Features

- Two S/S solid door PA counter chiller
- PA BakeryCounter with 800mm depth
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost
- 2 adjustable Shelves

Options

- Adjustable feet or Caster wheels
- Internal LED light
- Lock and key

Product Model	BC-2100TN	BC-3100TN
Unit dimensions (W/D/H mm)	1510*800*850	2020*800*850
Net capacity (L)	390	580
Cooling system	Ventilated	Ventilated
Temperature (°C)	-2~+10	-2~+10
Shelves No.	2	3
Interior light	Option	Option
Compressor	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R290
40 ° Container loading	30	28

PIZZA COUNTER

VENTILATED BAKERY COUNTER



PZS-2000/700



PZS-3000/800

Features

- Counter chiller with 700mm depth
- Compatible 7*GN1/3 pans on Prep-top
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- Internal LED light
- Lock and key
- GN1/4,GN1/6 Top



Product Model	PZS-2000/700	PZS-2000/800	PZS-3000/700	PZS-3000/800
Unit dimensions (W/D/H mm)	1360*700*1085	1510*800*1085	1795*700*1085	2020*800*1085
Net capacity (L)	282	390	417	580
Cooling system	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°C)	-2~+10	-2~+10	-2~+10	-2~+10
Shelves No.	2	2	3	3
Interior light	Option	Option	Option	Option
Compressor	ZEL/ZEL	ZEL/ZEL	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R290	R134a/R290
40 ° Container loading	48(HQ)	30(HQ)	38(HQ)	28(HQ)

PIZZA COUNTER VENTILATED PIZZA COUNTER



PZG-2600TN+VRX1500/380



PZG-1610TN+VRX1500/380

Features

- Pizza counter with VRX on the top
- Granite table top
- With 7 multi functional set of guides
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- Internal LED light
- Lock and key

PIZZA COUNTER VENTILATED PIZZA COUNTER



PZG-2610TN+VRX2000/380



PZG-3600TN+VRX2000/380

Features

- Pizza counter with VRX on the top
- Granite table top
- With 7 drawers for storage
- Int&Ext material stainless steel
- Revisable self-closing door
- Full length stainless steel handle
- Digital thermostat
- Ventilated cooling
- Automatic defrost

Options

- Adjustable feet or Caster wheels
- Internal LED light
- Lock and key

Product Model	PZG-2600TN	VRX-1500/380	PZG-1610TN	VRX-1500/380
Unit dimensions (W / D/ H mm)	1510*800*1000	1500*395*435	1510*800*1000	1500*395*435
Net capacity (L)	390	GN1/3*5+GN1/2*1	390	GN1/3*5+GN1/2*1
Cooling system	Ventilated	Static	Ventilated	Static
Temperature (°C)	-2~+10	0~+10	-2~+10	0~+10
Shelves No.	2	/	2	/
Interior light	Option	/	Option	/
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	30	261	30	261

Product Model	PZG-3600TN	VRX-2000/380	PZG-2610TN	VRX-2000/380
Unit dimensions (W / D/ H mm)	2020*800*1000	2000*395*435	2025*800*1000	2000*395*435
Net capacity (L)	580	GN1/3*9	580	GN1/3*9
Cooling system	Ventilated	Static	Ventilated	Static
Temperature (°C)	-2~+10	0~+10	-2~+10	0~+10
Shelves No.	3	/	2	/
Interior light	Option	/	Option	/
Compressor	Secop/Secop	ZEL/ZEL	Secop/Secop	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R600a	R134a/R290	R134a/R600a
40' Container loading	28	196	28	196

SALADETTE



S-900GS

Features

- European standard two door saladette
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove
- Without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- Compatible for 2*GN1/1 pans and 3*gn1/6 pans
- 2*GN1/1 shelves
- Fan cooling system or Ventilated cooling
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels



S-900

Options

- Ventilated cooling system/ glass doors/ SS 201 material



S-903/6D

SALADETTE
VENTILATED COOLING

SF-900



SF-903

Features

- New Ventilated cooling Saladette
- Finned Evaporator with assisted fan inside the inner box
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- GN1/1 shelves
- Fan assisted cooling system
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels

Options

- Ventilated cooling system/ glass doors/ SS 201 material

Product Model	SF-900	SF-903
Unit dimensions (W / D/ H mm)	900*740*850	1365*740*850
Net capacity (L)	240	368
Cooling system	Ventilated	Ventilated
Temperature (°C)	+4~+10	+4~+10
Shelves No.	2	3
Compressor	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R290
40 ' Container loading	72	48

SALADETTE



S-450



S-900



S-1365

Features

- European standard saladette
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- Compatible for GN1/1 pans and GN1/6 pans
- GN1/1 shelves
- Fan cooling system
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels

Options

- Ventilated cooling system/glass doors/ SS 201 material

Product Model	S-450	S-900	S-1365
Unit dimensions (W / D / H mm)	450*700*850	900*700*850	1365*700*850
Net capacity (L)	108	240	368
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10
Shelves No.	1	2	3
Compressor	ZEL	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R290
40' Container loading	150	72	48

SALADETTE



S-901



S-901 2D



S-901/4D

Features

- Saladette with stainless steel table top with GN1/2 Drawer
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- GN1/1 Shelves+ GN1/2 Drawer
- Fan assisted cooling system
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels

Options

- Ventilated cooling system/glass doors/ SS 201 material

Product Model	S-901	S-901-2D	S-901/4D
Unit dimensions (W / D / H mm)	900*700*850	900*700*850	900*700*850
Net capacity (L)	240	230	220
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10
Shelves No.	2	1 plus 2 Drawers GN1/2	4 Drawers GN1/2
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	72	72	72

SALADETTE



S-903S/S TOP

Features

- Three s/s solid door Saladette with stainless steel table top
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 3*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/glass doors/ SS 201 material/R290 New Refrigerant



S-903 6D

Features

- Saladette with stainless steel table top with 6*GN1/2 Drawer
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 6*GN1/2 Drawer
- Fan assisted cooling system

Options

- Ventilated cooling system/glass doors/ SS 201 material

Product Model	S-1365FLAT	S-1365/6D
Unit dimensions (W / D/ H mm)	1365*700*850	1365*700*850
Net capacity (L)	368	368
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	3	6 Drawers GN1/2
Compressor	Secop/Secop	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R290
40 ' Container loading	48	48

SALADETTE



PS-900

Features

- Two s/s solid door Saladette with Pre- top
- Refrigerated topping well for 5*GN1/6 Pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 2*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/glass doors/ SS 201 material/R290 New Refrigerant



PS-1365

Features

- Three s/s solid door Saladette with Pre- top
- Refrigerated topping well for 8*GN1/8 Pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 3*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/glass doors/ SS 201 material

Product Model	PS-900	PS-1365
Unit dimensions (W / D/ H mm)	900*700*970	1365*700*970
Net capacity (L)	240	392
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	2	3
Compressor	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R290
40 ' Container loading	72	48

SALADETTE



PS-900GR

Features

- Two s/s solid door Saladette with Granite top
- Refrigerated topping well for 5*GN1/6 Pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 2*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/ glass doors/ SS 201 material/ R290 New Refrigerant

Features

- Three s/s solid door Saladette with Granite top
- Refrigerated topping well for 8*GN1/6 Pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 3*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/ glass doors/ SS 201 material



PS-1365GR

Product Model	PS-900GR	PS-1365GR
Unit dimensions (W/D/H mm)	900*700*1075	1365*700*1075
Net capacity (L)	240	402
Cooling system	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10
Shelves No.	2	3
Compressor	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R290
40' Container loading	72	48(HQ)

SALADETTE



S-1400PZ+VRX1400/330

Features

- Three s/s solid door Saladette with Granite top
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 3*GN1/1 shelves
- Fan assisted cooling system
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels

Options

- Ventilated cooling system/ glass doors/ SS 201 material



Product Model	S-1400PZ	VRX-1400/330
Unit dimensions (W/D/H mm)	1400*700*1020	1400*335*435
Net capacity (L)	368	GN1/4*6
Cooling system	Static with fan cooling	Static
Temperature (°C)	0~+10	0~+10
Shelves No.	3	2
Compressor	Secop/Secop	ZEL/ZEL
Digital thermostat	Eliwell/Dixell	Dixell
Kind of coolant	R134a/R290	R134a/R600a
40' Container loading	48(HQ)	343

SALADETTE



S-900CG

Features

- Two s/s solid door Saladette with curved glass cover
- Open top suitable for 2*GN1/1 pans and 3*GN1/6 Pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 2*GN1/1 shelves
- Fan assisted cooling system

Options

- Ventilated cooling system/ glass doors/ SS 201 material/ R290 New Refrigerant



S-900SQ

Features

- Three s/s solid door saladette with squared glass cover
- Open top suitable for 4*GN1/1 pans
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 3*GN1/1 shelves
- Fan assisted cooling system
- CFC free foaming

Options

- Ventilated cooling system/ glass doors/ SS 201 material/ R290 New Refrigerant

Product Model	S-900SG	S-1365SG	S-900CG	S-1365CG
Unit dimensions (W/D/H mm)	900*700*850	1365*700*850	900*700*850	1365*700*850
Net capacity (L)	240	368	240	368
Cooling system	Static with fan cooling	Static with fan cooling	Static with fan cooling	Static with fan cooling
Temperature (°C)	0~+10	0~+10	0~+10	0~+10
Shelves No.	2	3	2	3
Compressor	ZEL/ZEL	Secop/Secop	ZEL/ZEL	Secop/Secop
Digital thermostat	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R290	R134a/R600a	R134a/R290
40 ' Container loading	72	48	72	48

SALADETTE



S-1045

Features

- Two s/s solid door saladette with top compatible for 3*GN1/1 Pan
- Interior and exterior stainless steel AISI304 material for high level product
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- 2*GN1/1 Shelves
- Fan assisted cooling system
- CFC free foaming
- R134a/R600a
- Adjustable feet or small caster wheels

Options

- Ventilated cooling system/glass doors/ SS 201 material/R290 New Refrigerant



Product Model	S-1045
Unit dimensions (W/D/H mm)	1045*700*850
Net capacity (L)	302
Cooling system	Static with fan cooling
Temperature (°C)	0~+10
Shelves No.	2
Compressor	ZEL/ZEL
Digital thermostat	Dixell
Kind of coolant	R134a/R600a
40 ' Container loading	60

REFRIGERATED TOPPING UNIT



VRX-2000/330



VRX-2000/380S/S LID


Product Model	VRX-1200/330	VRX-1400/330	VRX-1500/330	VRX-1600/330	VRX-1800/330
Unit dimensions (W/D/H mm)	1200*335*435	1400*335*435	1500*335*435	1600*335*435	1800*335*435
Net capacity (L)	GN1/4*5	GN1/4*6	GN1/4*7	GN1/4*8	GN1/4*9
Cooling system	Static	Static	Static	Static	Static
Temperature (°C)	0~+10	0~+10	0~+10	0~+10	0~+10
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
40' Container loading	386	336	310	294	260

REFRIGERATED TOPPING UNIT


Features

- European standard refrigerated topping unit
- Interior and exterior stainless steel AISI304 material for high level product
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco, Zanussi
- Accept GN1/4 pans for 330 range and GN1/3 pans for 380 range
- CFC free foaming
- R134a/R600a
- Adjustable feet
- Optional: top stainless steel cover/ SS 201 material/R290 New Refrigerant

330 SERIES

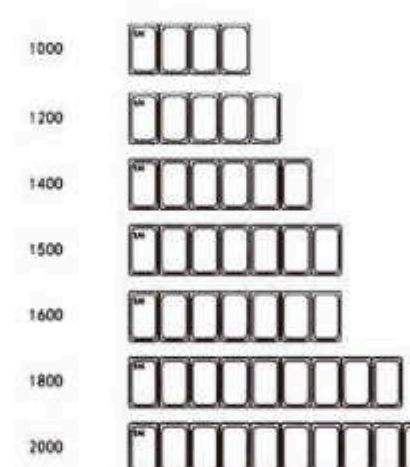


380 SERIES

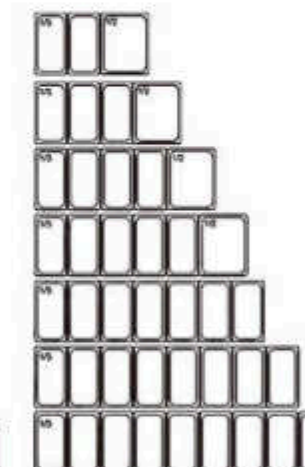


VRX-2000/330	VRX-1200/380	VRX-1400/380	VRX-1500/380	VRX-1600/380	VRX-1800/380	VRX-2000/380
2000*335*435	1200*395*435	1400*395*435	1500*395*435	1600*395*435	1800*395*435	2000*395*435
GN1/4*10	GN1/3*3+ GN1/2*1	GN1/3*4+ GN1/2*1	GN1/3*5+ GN1/2*1	GN1/3*7	GN1/3*8	GN1/3*9
Static	Static	Static	Static	Static	Static	Static
0~+10	0~+10	0~+10	0~+10	0~+10	0~+10	0~+10
ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
242	323	280	261	247	218	196

REFRIGERATED TOPPING UNIT

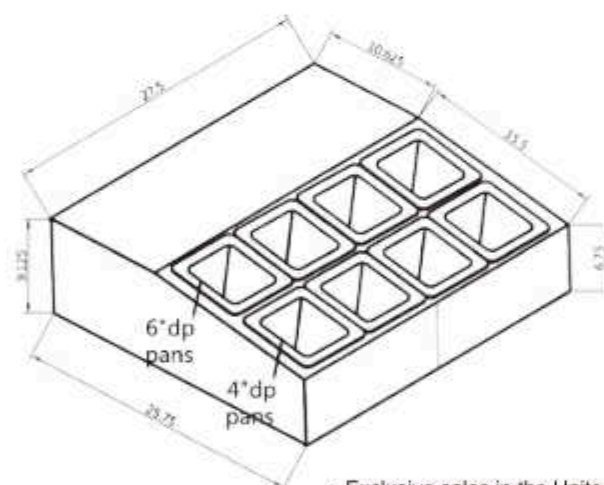

• Exclusive sales in the United States and Canada

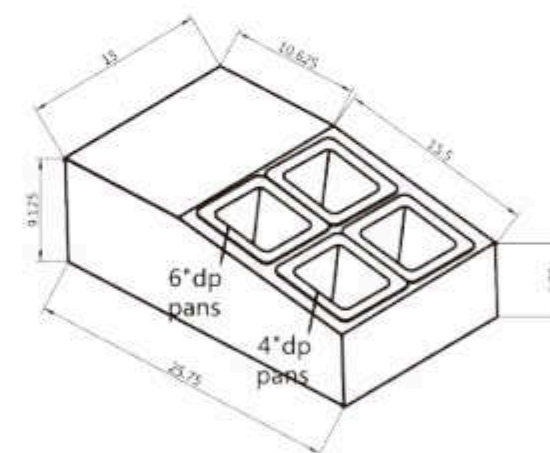

Features

- Interior and exterior stainless steel material for high level product
- High quality famous compressor: Zanussi
- Accept GN1/6 pans range
- CFC free foaming
- R134a/R600a
- Adjustable feet




Product Model	RTR-4	RTR-8
Internal Dimension(W/D/H mm)	300*145*156	624*145*156
External Dimension WITH WEELS(W/D/H mm)	379*656*236	699*656*236
Packing Dimension(W/D/H mm)	450*715*380	770*715*380
Refrigerant	R600a	R600a
Net Volume	GN1/6*4	GN1/6*8
Cooling system	static	static
Temperature Control	Mechanical thermostat	Mechanical thermostat
Compressor standard	ZEL	ZEL
Temperature(°C)	0-10	0-10
40 ' Container loading	560	336

REACH-IN



AM-27R

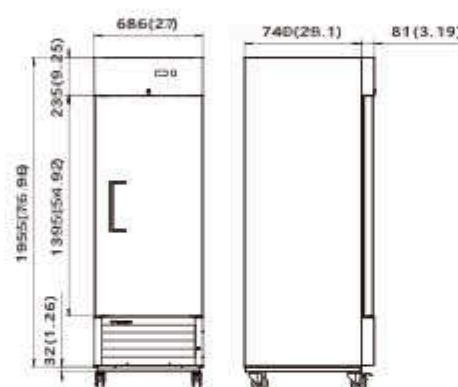

AM-27R & AM-27F




Features

- American fashionable style upright cabinet chiller/freezer
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco
- Internal LED light




AM-54R

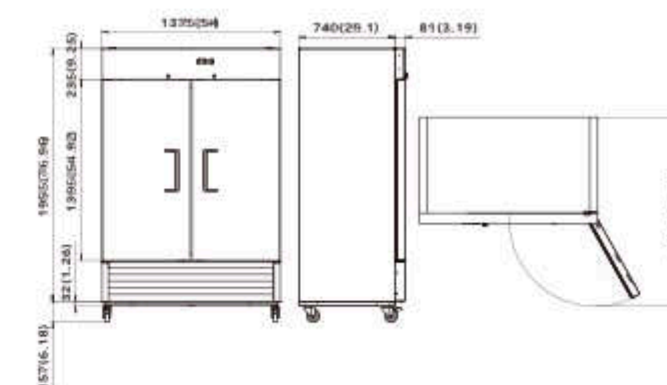

AM-54R & AM-54F



AM-81R

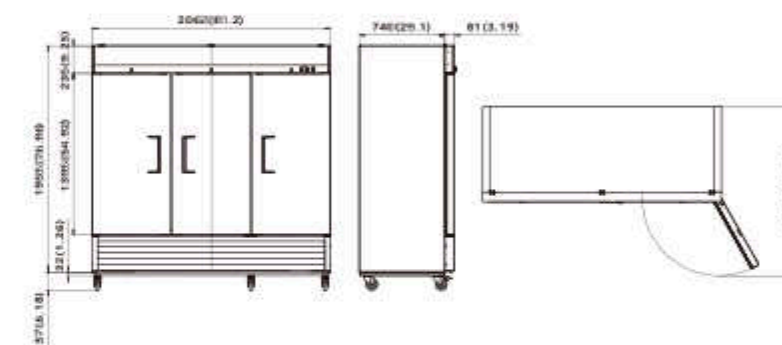


AM-81R & AM-81F

Product Model	AM-27R	AM-27F	AM-54R	AM-54F	AM-81R	AM-81F
Unit dimensions (W/D/H mm/inch)	686*815*2111 27*32 ^{1/8} *83 ^{1/8}	686*815*2111 27*32 ^{1/8} *83 ^{1/8}	1375*815*2111 54 ^{1/8} *32 ^{1/8} *83 ^{1/8}	1375*815*2111 54 ^{1/8} *32 ^{1/8} *83 ^{1/8}	2050*815*2106 80 ^{5/7} *32 ^{1/8} *82 ^{5/8}	2050*815*2106 80 ^{5/7} *32 ^{1/8} *82 ^{5/8}
Packing dimensions (W/D/H mm/inch)	726*890*2187 28 ^{4/7} *35*86 ^{1/8}	726*890*2187 28 ^{4/7} *35*86 ^{1/8}	1415*890*2187 55 ^{5/7} *35*86 ^{1/8}	1415*890*2187 55 ^{5/7} *35*86 ^{1/8}	2090*890*2187 82 ^{2/7} *35*86 ^{1/8}	2090*890*2187 82 ^{2/7} *35*86 ^{1/8}
Net capacity (CUFT)	21	21	46	46	63	63
Net Capacity(L)	594	594	1302	1302	1784	1784
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	-10~10	33~41	-10~10	33~41	-10~10
Kind Of Refrigerant	R290	R290	R290	R290	R290	R290
Compressor	Cubigel	Cubigel	Cubigel	Cubigel	Cubigel	Cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital (IREVCOHNOO)
Light	LED	LED	LED	LED	LED	LED
Number of Shelves	3	3	6	6	9	9
Number of Door	1	1	2	2	3	3
40' Container load	39	39	21	21	13	13

REACH-IN



AM-27R

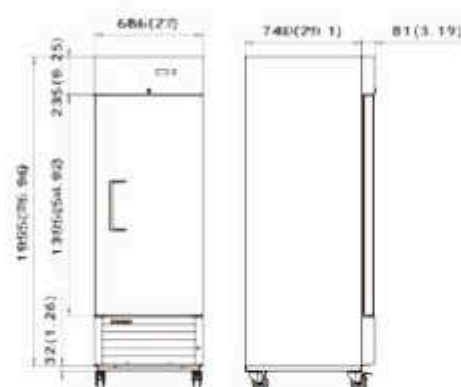

AM-27R & AM-27F




Features

- American fashionable style upright cabinet chiller/freezer
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Elwell
- High quality famous compressor Embraco
- Internal LED light




AM-54R

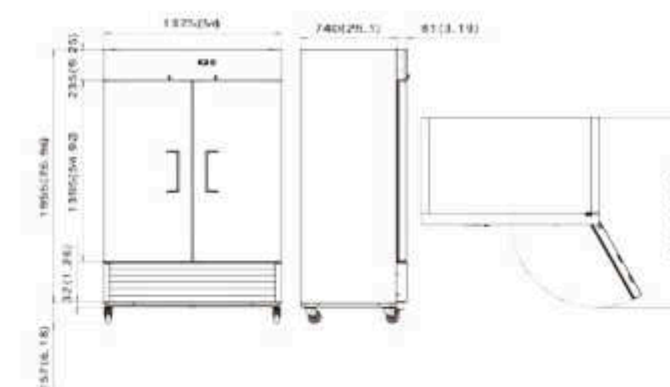

AM-54R&AM-54F



AM-81R

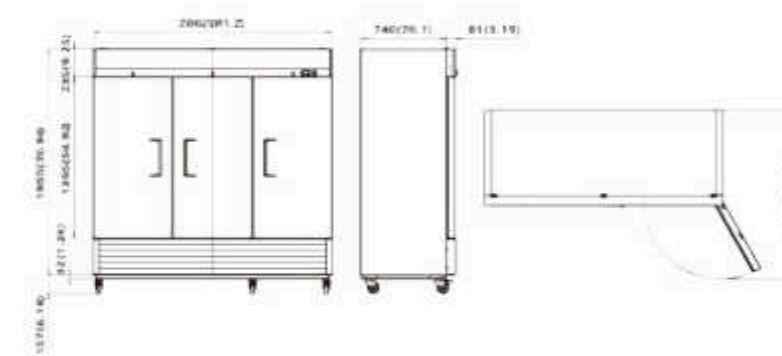

AM-81R&AM-81F

Product Model	AM-27R	AM-27F	AM-54R	AM-54F	AM-81R	AM-81F
Unit dimensions (W/D/H mm/inch)	686*815*2111 27*32 ^{1/8} *83 ^{1/8}	686*815*2111 27*32 ^{1/8} *83 ^{1/8}	1375*815*2111 54 ^{1/8} *32 ^{1/8} *83 ^{1/8}	1375*815*2111 54 ^{1/8} *32 ^{1/8} *83 ^{1/8}	2050*815*2106 80 ^{3/4} *32 ^{1/8} *82 ^{3/8}	2050*815*2106 80 ^{3/4} *32 ^{1/8} *82 ^{3/8}
Packing imensions (W/D/H mm/inch)	726*890*2187 28 ^{5/7} *35*86 ^{1/8}	726*890*2187 28 ^{5/7} *35*86 ^{1/8}	1415*890*2187 55 ^{5/7} *35*86 ^{1/8}	1415*890*2187 55 ^{5/7} *35*86 ^{1/8}	2090*890*2187 82 ^{2/7} *35*86 ^{1/8}	2090*890*2187 82 ^{2/7} *35*86 ^{1/8}
Net capacity (CUFT)	21	21	46	46	63	63
Net Capacity(L)	594	594	1302	1302	1784	1784
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	-10~10	33~41	-10~10	33~41	-10~10
Kind Of Refrigerant	R290	R290	R290	R290	R290	R290
Compressor	Cubigel	Cubigel	Cubigel	Cubigel	Cubigel	Cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital (IREVCOHNOO)
Light	LED	LED	LED	LED	LED	LED
Number of Shelves	3	3	6	6	9	9
Number of Door	1	1	2	2	3	3
40' Container load	39	39	21	21	13	13


REACH-IN




AM-27RG



AM-27RG & AM-27FG




AM-54RG

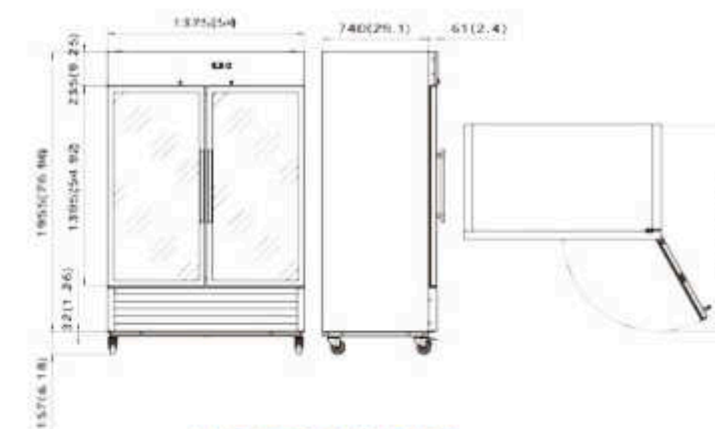

AM-54RG & AM-54FG



AM-81RG

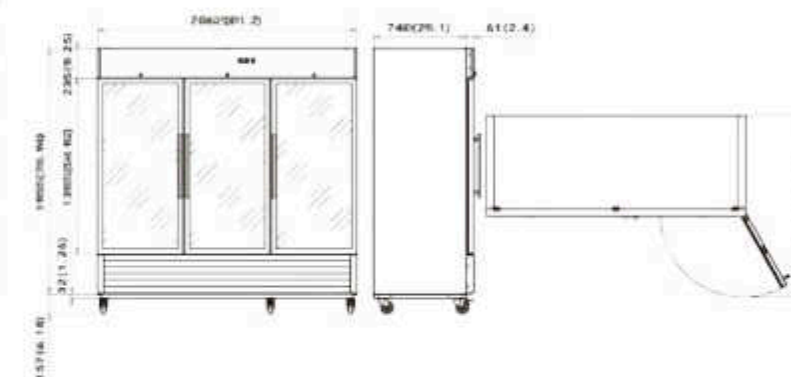

AM-81RG & AM-81FG

Features

- American fashionable style upright cabinet chiller/freezer
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco
- Internal LED light

Product Model	AM-27F	AM-27FG	AM-54RG	AM-54FG	AM-81RG	AM-81FG
Unit dimensions (W/D/H mm/inch)	686*835*2111 27.0*32.9*83.1	686*835*2111 27.0*32.9*83.1	1375*835*2111 54.1*32.9*83.1	1375*835*2111 54.1*32.9*83.1	2050*835*2106 80.7*32.9*83.1	2050*835*2106 80.7*32.9*83.1
Packing imensions (W/D/H mm/inch)	83.1*726*890* 218728.4*35*86.1	83.1*726*890* 218728.4*35*86.1	1415*890*2187 55.7*35*86.1	1415*890*2187 55.7*35*86.1	2090*890*2187 82.3*35*86.1	2090*890*2187 82.3*35*86.1
Net capacity (CUFT)	21	21	46	46	63	63
Net Capacity(L)	594	594	1302	1302	1784	1784
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	-10~10	-10~10	33~41	-10~10	33~41	-10~10
Kind Of Refrigerant	R290	R290	R290	R290	R290	R290
Compressor	Cubigel	Cubigel	Cubigel	Embraco	Cubigel	Cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital (IREVCOHNOO)
Light	LED	LED	LED	LED	LED	LED
Number of Shelves	3	3	6	6	9	9
Number of Door	1	1	2	2	3	3
40' Container load	39	39	21	21	13	13

UNDER COUNTER REFRIGERATOR




Optional
Standard



AM-29R



AM-60R

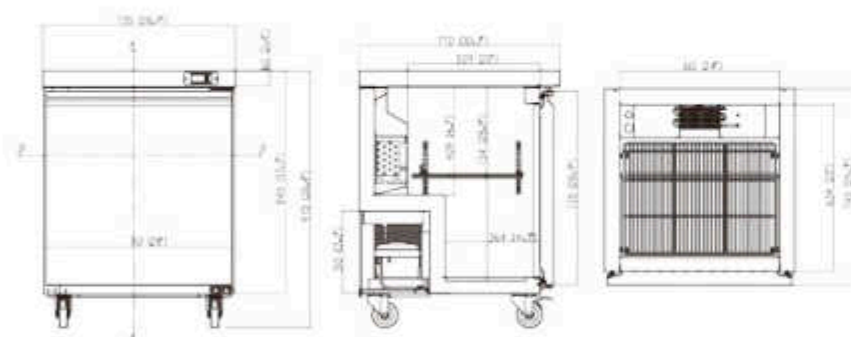


AM-29R

Features


- American fashionable style counter
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco

Options


- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors
- Special various front panel design according to customer request

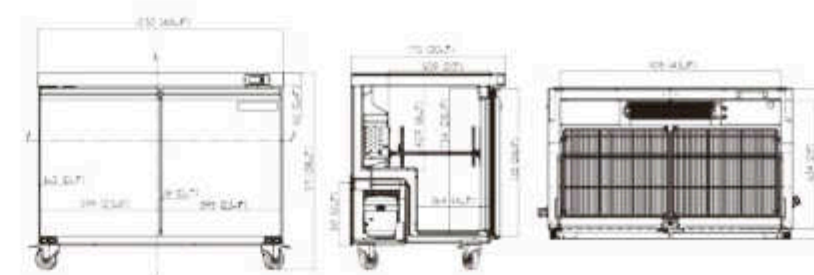

AM-48R

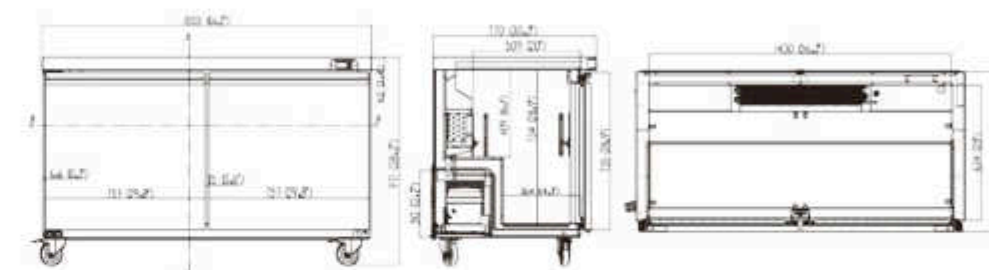

AM-60R

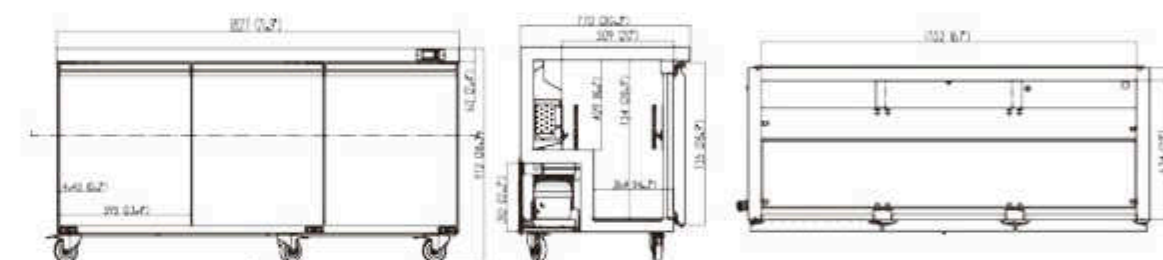

AM-72R

Product Model	AM-29R	AM-48R	AM-60R	AM-72R
Unit dimensions (W / D/ H mm)	735*799*966	1230*799*966	1555*799*966	1827*799*966
Unit dimensions (W / D/ H inch)	28 ⁹ / ₁₆ *31 ⁴ / ₁₆ *38	48 ³ / ₁₆ *31 ⁴ / ₁₆ *38	61 ²⁹ / ₁₆ *31 ⁴ / ₁₆ *38	71 ⁵⁹ / ₁₆ *31 ⁴ / ₁₆ *38
Packing dimensions (W / D/ H mm)	783*847*1029	1278*847*1029	1603*847*1029	1875*847*1029
Packing dimensions (W / D/ H inch)	30 ⁹ / ₁₆ *33 ¹ / ₁₆ *40 ¹ / ₂	50 ¹³ / ₁₆ *33 ¹ / ₁₆ *40 ¹ / ₂	63 ¹⁹ / ₁₆ *33 ¹ / ₁₆ *40 ¹ / ₂	73 ¹⁹ / ₁₆ *33 ¹ / ₁₆ *40 ¹ / ₂
Net capacity (CUFT)	6.7	11.1	14.1	16.6
Net Capacity(L)	190	314	399	470
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	33~41	33~41	33~41
Kind Of Refrigerant	R290	R290	R290	R290
Compressor	Embraco	Embraco	Embraco	Embraco
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/	/
Number of Shelves	1	2	2	3
Number of Door	1	2	2	3
40' Container load	60	46	28	28

UNDER COUNTER FREEZER




Optional
Standard



AM-29F



AM-60F

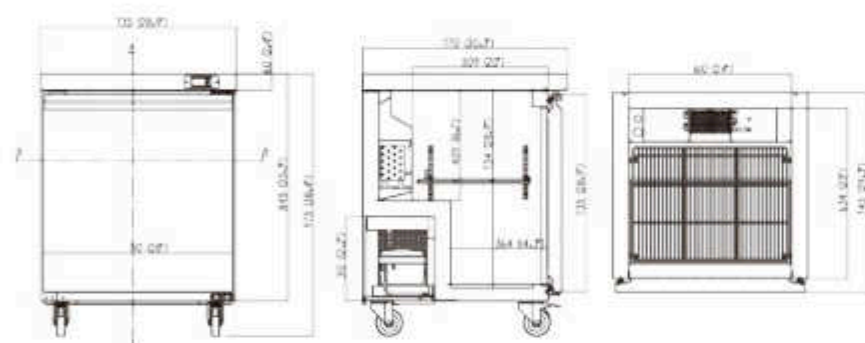


AM-29F

Features


- American fashionable style counter
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor Embraco/Internal LED light

Options


- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors
- Special various front panel design according to customer request

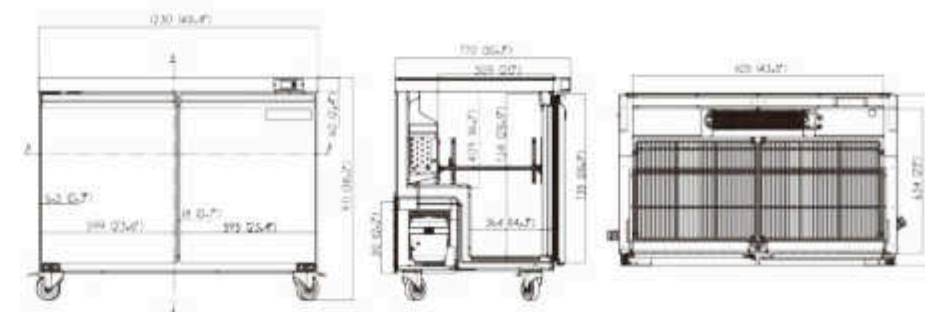

AM-48F

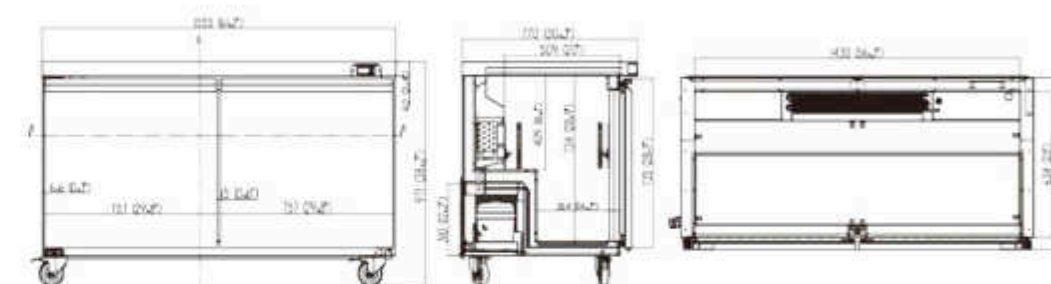

AM-60F

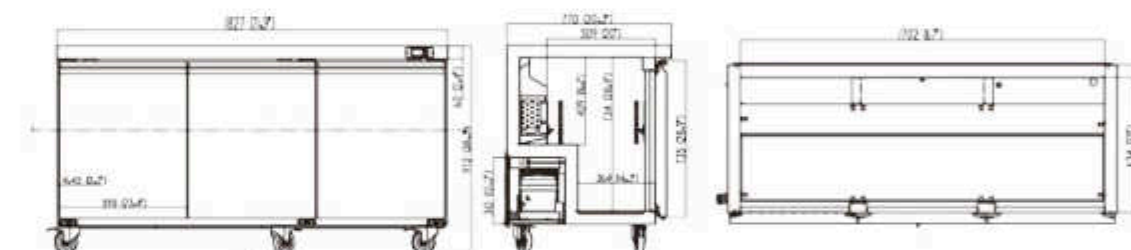

AM-72F

Product Model	AM-29F	AM-48F	AM-60F	AM-72F
Unit dimensions (W / D/ H mm)	735*799*966	1230*799*966	1555*799*966	1827*799*966
Unit dimensions (W / D/ H inch)	28 ^{9/16} *31 ^{4/8} *38	48 ^{3/7} *31 ^{4/8} *38	61 ^{29/32} *31 ^{4/8} *38	71 ^{8/9} *31 ^{4/8} *38
Packing dimensions (W / D/ H mm)	783*847*1029	1278*847*1029	1603*847*1029	1875*847*1029
Packing dimensions (W / D/ H inch)	30 ^{9/16} *33 ^{13/16} *40 ^{1/2}	50 ^{13/16} *33 ^{13/16} *40 ^{1/2}	63 ^{19/32} *33 ^{13/16} *40 ^{1/2}	73 ^{9/16} *33 ^{13/16} *40 ^{1/2}
Net capacity (CUFT)	6.7	11.1	14.1	16.6
Net Capacity(L)	190	314	399	470
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	-10~-10	-10~-10	-10~-10	-10~-10
Kind Of Refrigerant	R290	R290	R290	R290
Compressor	Embraco	Embraco	Embraco	Embraco
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/	/
Number of Shelves	1	2	2	3
Number of Door	1	2	2	3
40 ° Container load	60	46	28	28

PIZZA PREP TABLE



Optional
Standard



PZP-67




Features


- American fanstyleable style Saladette
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90°open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell
- High quality famous compressor: Embraco

Options


- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors

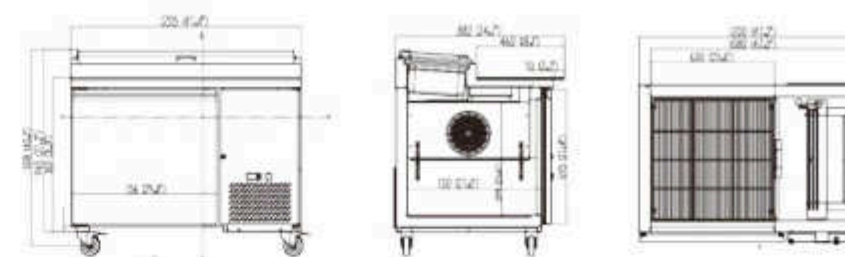

PZP-44

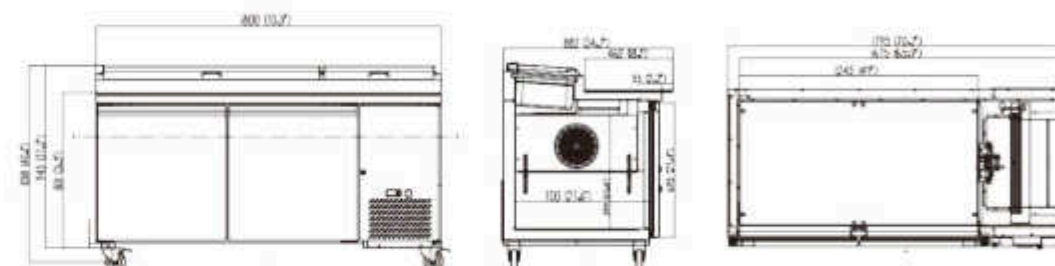

PZP-67

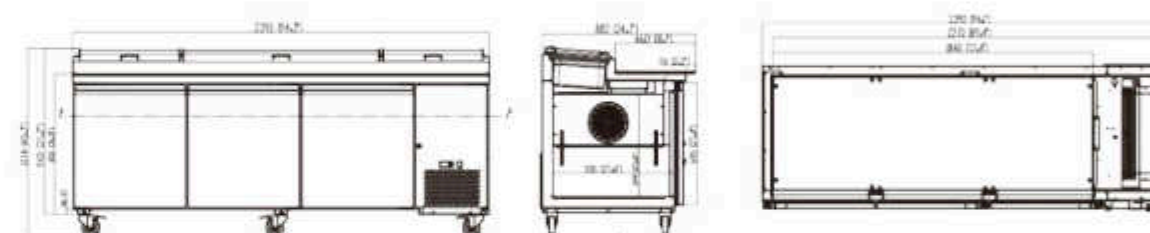

PZP-93

Product Model	PZP-44	PZP-67	PZP-93
Unit dimensions (W / D/ H mm)	1117*820*1062	1702*820*1062	2362*820*1062
Unit dimensions (W / D/ H inch)	44*32 ^{2/7} *41 ^{4/5}	67*32 ^{2/7} *41 ^{4/5}	93*32 ^{2/7} *41 ^{4/5}
Packing dimensions (W / D/ H mm)	1161*871*1146	1750*871*1146	2406*871*1146
Packing dimensions (W / D/ H inch)	45 ^{5/7} *34 ^{2/7} *45 ^{1/9}	68 ^{5/8} *34 ^{2/7} *45 ^{1/9}	95 ^{5/7} *34 ^{2/7} *45 ^{1/9}
Net capacity (CUFT)	10.9	20.9	30.8
Net Capacity(L)	310L	592L	872L
Cooling System	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	33~41	33~41
Kind Of Refrigerant	R290	R290	R290
Compressor	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/
Number of Shelves	1	2	3
Number of Door	1	2	3
40 ° Container load	52	26	8

SALAD AND SANDWICH PREP TABLE




Optional
Standard



SWPR-48



SWPR-72

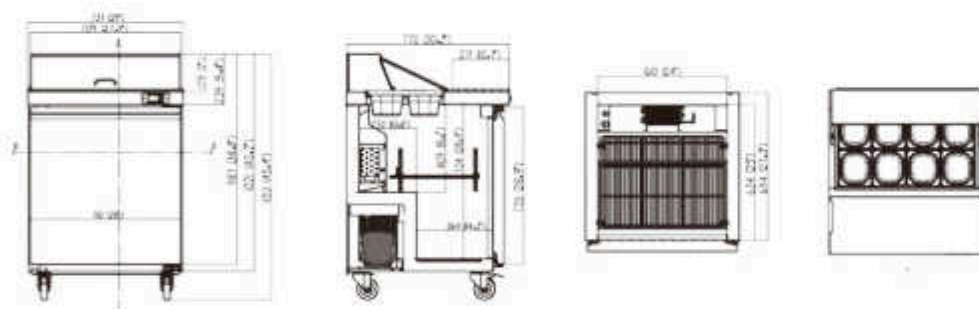


SWPR-29

Features


- American fashionable style Saladette
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Elwell
- High quality famous compressor Embraco

Options


- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors

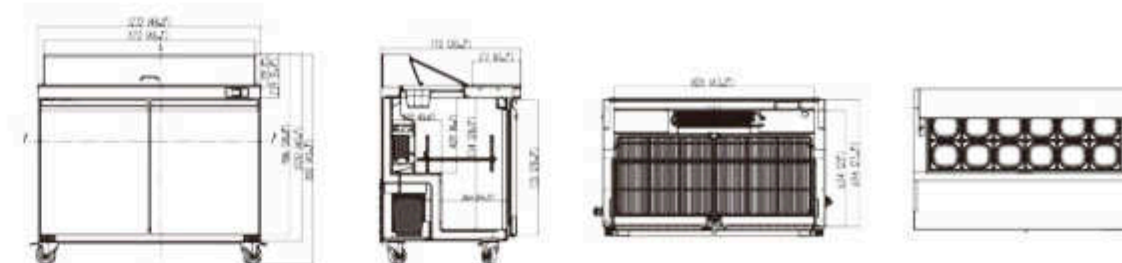

SWPR-48

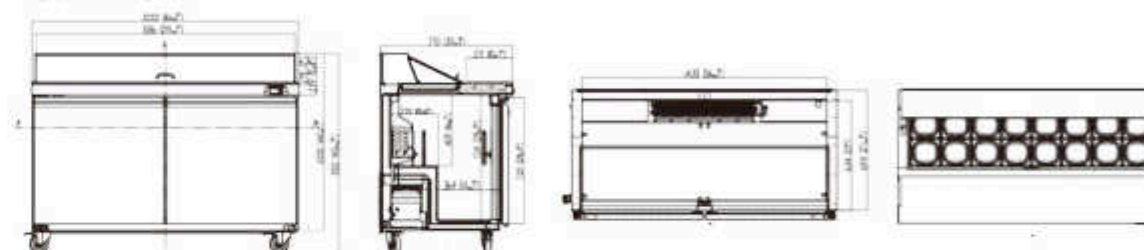

SWPR-60

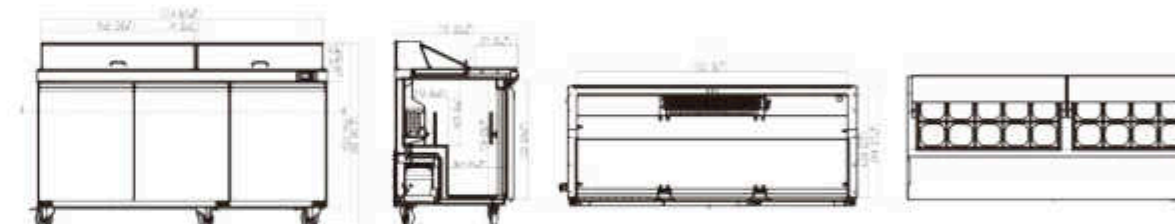

SWPR-72

Product Model	SWPR-29	SWPR-48	SWPR-60	SWPR-72
Unit dimensions (W / D / H mm)	735*799*1144	1230*799*1144	1555*799*1144	1827*799*1144
Unit dimensions (W / D / H inch)	28 ⁹ / ₁₆ *31 ⁴ / ₁₆ *45	48 ³ / ₁₆ *31 ⁴ / ₁₆ *45	61 ² / ₁₆ *31 ⁴ / ₁₆ *45	71 ⁸ / ₁₆ *31 ⁴ / ₁₆ *45
Packing dimensions (W / D / H mm)	783*847*1225	1278*847*1225	1603*847*1225	1875*847*1225
Packing dimensions (W / D / H inch)	30 ⁵ / ₁₆ *33 ¹ / ₁₆ *48 ² / ₁₆	50 ¹ / ₁₆ *33 ¹ / ₁₆ *48 ² / ₁₆	63 ¹ / ₁₆ *33 ¹ / ₁₆ *48 ² / ₁₆	73 ⁵ / ₁₆ *33 ¹ / ₁₆ *48 ² / ₁₆
Net capacity (CUFT)	7.6	13.8	17.8	21.2
Net Capacity(L)	215L	390L	505L	601L
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	33~41	33~41	33~41
Kind Of Refrigerant	R290	R290	R290	R290
Compressor	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/	/
Number of Shelves	1	2	2	3
Number of Door	1	2	2	3
40 ° Container load	60	46	28	28

SALAD AND SANDWICH PREP TABLE




SWPR-29D2



SWPR-48D2



SWPR-72D2

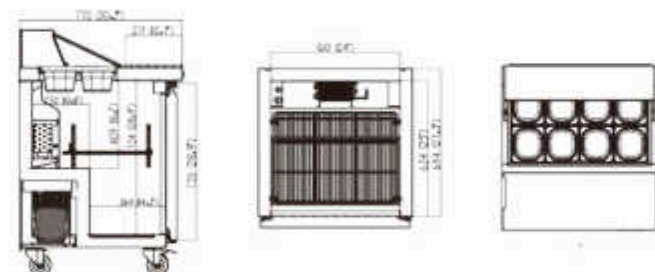


Features

- American fashionable style Saladette
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat. Italian famous brand Dixell, Carel, Elwell
- High quality famous compressor. Embraco


Options

- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors

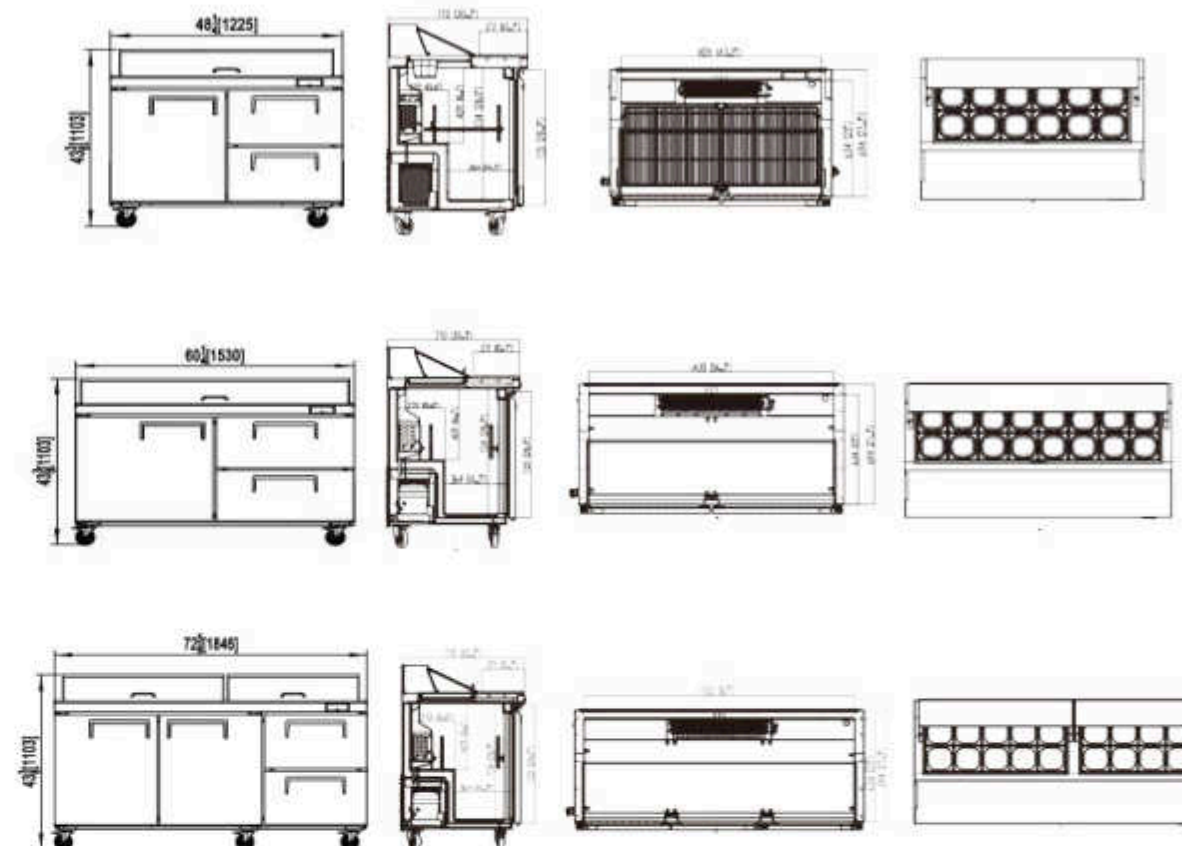

Product Model	SWPR-29D2	SWPR-48D2	SWPR-60D2	SWPR-72D2
Unit dimensions (W / D / H mm)	735*799*1144	1230*799*1144	1555*799*1144	1827*799*1144
Unit dimensions (W / D / H inch)	28.9*31.4*45	48.3*31.4*45	61.2*31.4*45	71.9*31.4*45
Packing dimensions (W / D / H mm)	783*847*1225	1278*847*1225	1603*847*1225	1875*847*1225
Packing dimensions (W / D / H inch)	30.8*33.3*48.2	50.3*33.3*48.2	63.1*33.3*48.2	73.8*33.3*48.2
Net capacity (CUFT)	7.6	13.8	17.8	21.2
Net Capacity(L)	215L	390L	505L	601L
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	33~41	33~41	33~41
Kind Of Refrigerant	R290	R290	R290	R290
Compressor	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/	/
Number of Shelves	0	1	1	2
Number of Door	0	1	1	2
Number of Drawers	2	2	2	2


SALAD AND SANDWICH PREP TABLE



SWPR-29(L)



SWPR-48(L)

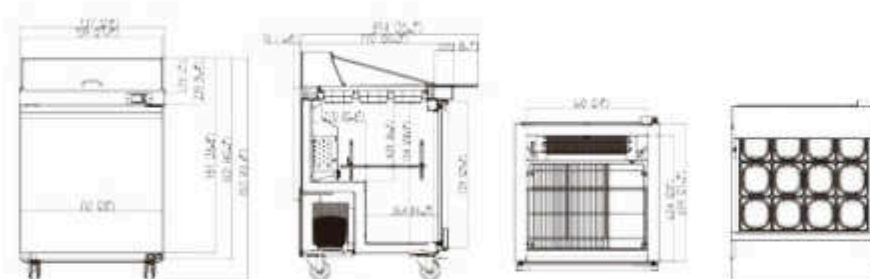


SWPR-29(L)

Features


- American fashionable style Saladette
- Exterior material SS430, interior Pre-coated Aluminum
- Reversible doors and automatically self close when less than 90° open
- Inner box curved edges for easy cleaning
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools
- With Lock and key
- Digital thermostat Italian famous brand Dixell, Carel, Elwell
- High quality famous compressor Embraco

Options


- Fans: Germany Well-known brand EBM fans
- Automatic defrost cooling system
- Adjustable stainless steel feet or lockable castors

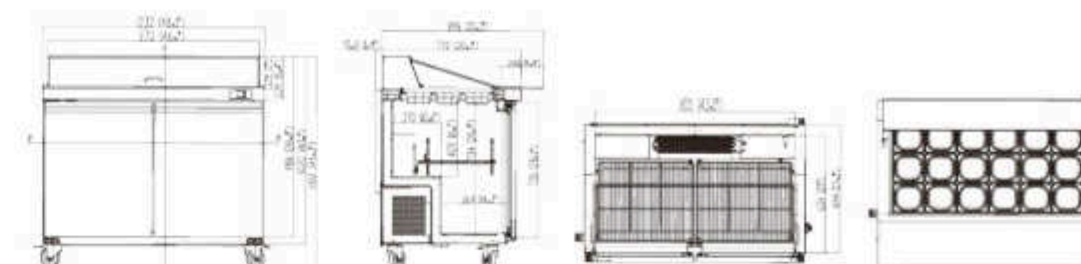

SWPR-48(L)

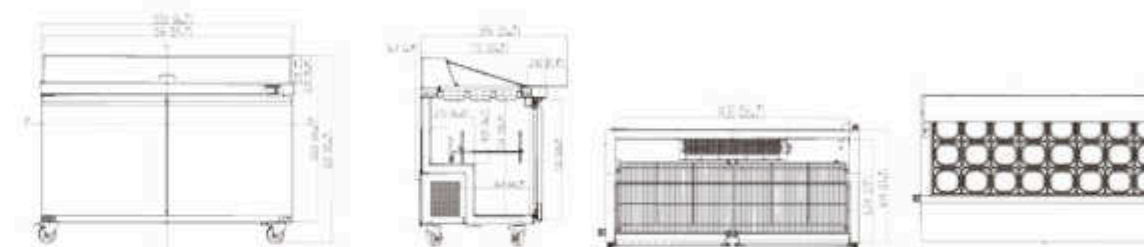

SWPR-60(L)

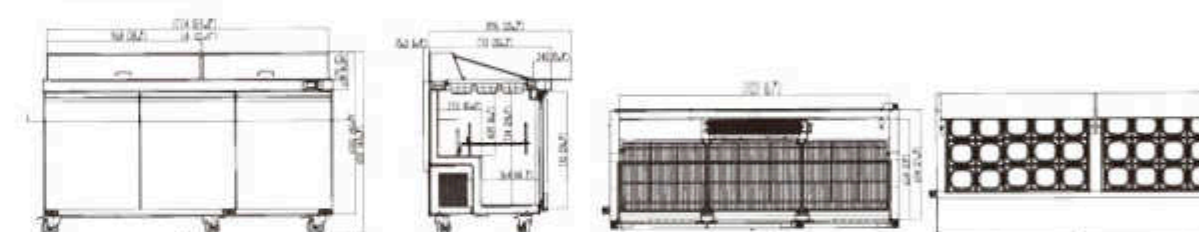

SWPR-72(L)

	SWPR-29(L)	SWPR-48(L)	SWPR-60(L)	SWPR-72(R)
Unit dimensions (W / D / H mm)	735*892*1196	1230*892*1196	1555*892*1196	1827*892*1196
Unit dimensions (W / D / H inch)	28 ^{9/16} *35 ^{1/8} *47 ^{1/8}	48 ^{3/8} *35 ^{1/8} *47 ^{1/8}	61 ^{29/32} *35 ^{1/8} *47 ^{1/8}	71 ^{8/9} *35 ^{1/8} *47 ^{1/8}
Packing dimensions (W / D / H mm)	783*933*1277	1278*933*1277	1603*933*1277	1875*933*1277
Packing dimensions (W / D / H inch)	30 ^{5/8} *36 ^{3/4} *50 ^{2/7}	50 ^{1/3} *36 ^{3/4} *50 ^{2/7}	63 ^{1/8} *36 ^{3/4} *50 ^{2/7}	73 ^{5/6} *36 ^{3/4} *50 ^{2/7}
Net capacity (CUFT)	7.6	13.8	17.8	21.2
Net Capacity(L)	215L	390L	505L	601L
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Temperature range(°F)	33~41	33~41	33~41	33~41
Kind Of Refrigerant	R290	R290	R290	R290
Compressor	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel	SECOP/cubigel
Controller Brand	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)	Digital(Dixell)
Light	/	/	/	/
Number of Shelves	1	2	2	3
Number of Door	1	2	2	3
40 ' Container load	60	42	28	24

Upright Chiller & Freezer

43°C Ambient Temperature



Ventilated

Features

- High Density 72mm Cyclopentane PUF
- Thicker Insulation Providing Greater Energy Efficiency
- Designed to Operate at 43°C Ambient Temperature and 60% Humidity
- Equipped with a drawer-type water pan to load the Defrosting Water
- Hot Gas heating of the frame to avoid the water drop
- Eco-friendly & Energy Efficient R290 Refrigerant
- Ventilated Cooling- Uniform Cooling Performance

- Sturdy Construction with Stainless Steel 201
- Providing Greater Energy Efficiency
- Italy Digital Controller
- Self Closing Doors
- GN Pans Compatible
- Automatic defrosting system

Options

- Adjustable stainless steel feet or lockable castors
- 430 Steel
- 304 Steel



Supplier's Model	516 TNM	1000 TNM	516BTM	1000 BTM
Product dimension (W*D*H,mm)	680×750×2000	1220×760×2000	680×750×2000	1200×750×2000
Packing Size	710×800×2050	1250×800×2050	710×800×2050	1250×800×2050
Capacity	516L	1000L	516L	1000L
Cooling Way	Ventilated	Ventilated	Ventilated	Ventilated
Shelves Number	2	4	2	4
Compressor	Donpe	Embraco	Donper	Embraco
Refrigerant	R290	R290	R290	R290
Refrigeration Pipes	Copper	Copper	Copper	Copper
Power Supply	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ
Light	Inner LED	Inner LED	Inner LED	Inner LED
Temperature: (°C)	+2 ~ 8°C	+2 ~ 8°C	-18~ -15°C	-18~ -15°C
Thermostat	Italy Brand	Italy Brand	Italy Brand	Italy Brand
Materials	SS201	SS201	SS201	SS201
Hinged Doors	2	4	2	4
Insulation	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Insulation Thickness	72mm	72mm	72mm	72mm
Drain Hole	YES	YES	YES	YES
40' container loading	44	24	44	24

Counter Chiller & Freezer

43°C Ambient Temperature



Ventilated

Features

- High Density 60mm Cyclopentane PUF
- Thicker Insulation Providing Greater Energy Efficiency, Keep Cool ≥4h After Power is Off
- Designed to Operate at 43°C Ambient Temperature and 60% Humidity
- Equipped with a drawer-type water pan to load the Defrosting Water
- Equipped with a Fan to Cool Down the Compressor
- Eco-friendly & Energy Efficient R290 Refrigerant
- Ventilated Cooling- Uniform Cooling Performance

- Sturdy Construction with Stainless Steel 201
- Providing Greater Energy Efficiency
- Italy Digital Controller
- Self Closing Doors
- GN Pans Compatible
- Automatic defrosting system

Options

- Adjustable stainless steel feet or lockable castors
- 430 Steel
- 304 Steel



Supplier's Model	270TN	380TN	480TN	270BT	380BT	480BT
Product dimension (W*D*H,mm)	1200×700×850	1500×700×850	1800×700×850	1200×700×850	1500×700×850	1800×700×850
Packing Size	1240×750×870	1540×750×870	1840×750×870	1240×750×870	1540×750×870	1840×750×870
Capacity	270L	380L	480L	270L	380L	480L
Cooling Way	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves Number	2	2	3	2	2	3
Compressor	Donper	Donper	Donper	Embraco	Embraco	Embraco
Refrigerant	R290	R290	R290	R290	R290	R290
Refrigeration Pipes	Copper	Copper	Copper	Copper	Copper	Copper
Power Supply	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ
Light	Inner LED	Inner LED	Inner LED	Inner LED	Inner LED	Inner LED
Temperature: (°C)	+2 ~ 8°C	+2 ~ 8°C	+2 ~ 8°C	-18~ -15°C	-18~ -15°C	-18~ -15°C
Thermostat	Italy Brand	Italy Brand	Italy Brand	Italy Brand	Italy Brand	Italy Brand
Materials	SS201	SS201	SS201	SS201	SS201	SS201
Hinged Doors	2	2	3	2	2	3
Insulation	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Insulation Thickness	60mm	60mm	60mm	60mm	60mm	60mm
Drain Hole	YES	YES	YES	YES	YES	YES
40' container loading	81	66	57	81	66	57

Upright Chiller & Freezer 43°C Ambient Temperature



Features

- High Density 72mm Cyclopentane PUF
- Thicker Insulation Providing Greater Energy Efficiency
- Designed to Operate at 43°C Ambient Temperature and 60% Humidity
- Equipped with a drawer-type water pan to load the Defrosting Water
- Hot Gas heating of the frame to avoid the water drop
- Eco-friendly & Energy Efficient R290 Refrigerant
- Static Cooling- Copper Pipes with The Best Cooling Performance
- Sturdy Construction with Stainless Steel 201
- Providing Greater Energy Efficiency
- Italy Digital Controller
- Self Closing Doors
- GN Pans Compatible

Options

- Adjustable stainless steel feet or lockable castors
- 430 Steel
- 304 Steel

Counter Chiller & Freezer 43°C Ambient Temperature



Features

- High Density 60mm Cyclopentane PUF
- Thicker Insulation Providing Greater Energy Efficiency, Keep Cool ≥4h After Power is Off
- Designed to Operate at 43°C Ambient Temperature and 60% Humidity
- Equipped with a drawer-type water pan to load the Defrosting Water
- Equipped with a Fan to Cool Down the Compressor
- Eco-friendly & Energy Efficient R290 Refrigerant
- Static Cooling- Copper Pipes with The Best Cooling Performance
- Sturdy Construction with Stainless Steel 201
- Providing Greater Energy Efficiency
- Italy Digital Controller
- Self Closing Doors
- GN Pans Compatible

Options

- Adjustable stainless steel feet or lockable castors
- 430 Steel
- 304 Steel


Supplier's Model	516 TNSM	1000 TNSM	516BTSM	1000 BTSM
Product dimension (W*D*H,mm)	680×750×2000	1220×760×2000	680×750×2000	1200×750×2000
Packing Size	710×800×2050	1250×800×2050	710×800×2050	1250×800×2050
Capacity	516L	1000L	516L	1000L
Cooling Way	Static	Static	Static	Static
Shelves Number	2	4	2	4
Compressor	Donper	Embraco	Donper	Embraco
Refrigerant	R290	R290	R290	R290
Refrigeration Pipes	Copper	Copper	Copper	Copper
Power Supply	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ
Light	Inner LED	Inner LED	Inner LED	Inner LED
Temperature: (°C)	+2 ~ 8°C	+2 ~ 8°C	-18~ -15°C	-18~ -15°C
Thermostat	Italy Brand	Italy Brand	Italy Brand	Italy Brand
Materials	SS201	SS201	SS201	SS201
Hinged Doors	2	4	2	4
Insulation	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Insulation Thickness	72mm	72mm	72mm	72mm
Drain Hole	YES	YES	YES	YES
40' container loading	44	24	44	24

Supplier's Model	270TNS	380TNS	480TNS	270BTS	380BTS	480BTS
Product dimension (W*D*H,mm)	1200×700×850	1500×700×850	1800×700×850	1200×700×850	1500×700×850	1800×700×850
Packing Size	1240×750×870	1540×750×870	1840×750×870	1240×750×870	1540×750×870	1840×750×870
Capacity	270L	380L	480L	270L	380L	480L
Cooling Way	Static	Static	Static	Static	Static	Static
Shelves Number	2	2	2	2	2	2
Compressor	Donper	Donper	Donper	Embraco	Embraco	Embraco
Refrigerant	R290	R290	R290	R290	R290	R290
Refrigeration Pipes	Copper	Copper	Copper	Copper	Copper	Copper
Power Supply	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ	220V,50HZ
Light	Inner LED	Inner LED	Inner LED	Inner LED	Inner LED	Inner LED
Temperature: (°C)	+2 ~ 8°C	+2 ~ 8°C	+2 ~ 8°C	-18~ -15°C	-18~ -15°C	-18~ -15°C
Thermostat	Italy Brand	Italy Brand	Italy Brand	Italy Brand	Italy Brand	Italy Brand
Materials	SS201	SS201	SS201	SS201	SS201	SS201
Hinged Doors	2	2	3	2	2	3
Insulation	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Insulation Thickness	60mm	60mm	60mm	60mm	60mm	60mm
Drain Hole	YES	YES	YES	YES	YES	YES
40' container loading	81	66	57	81	66	57


CHEF BASE



CB-36TN

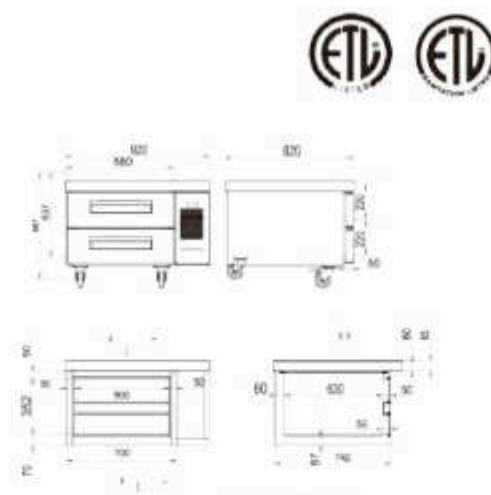

CB-52TN

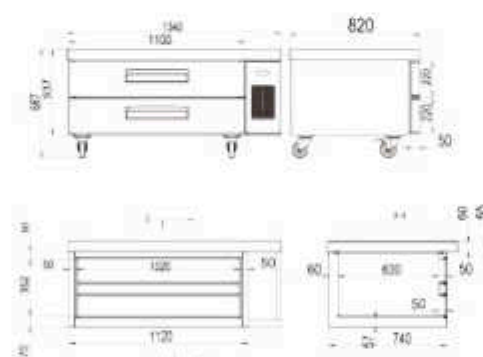

Features


- Adjustable stainless steel feet or lockable castors
- Exterior material and interior material SS201
- Digital thermostat
- High quality compressor: Huayi
- With evaporator fan and condenser fan
- With drawers
- With strong castors

Options

- Exterior or interior material SS304



CB-72TN

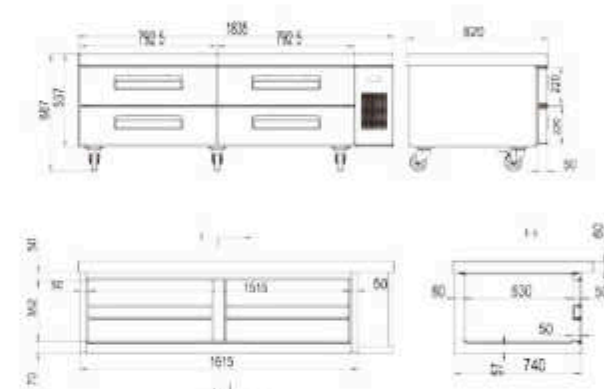

Product Model	CB-36TN	CB-52TN	CB-72TN
Unit dimension (W/D/H mm)	920*820*685	1340*820*685	1835*820*685
Packing dimension (W/D/H mm)	980*880*730	1400*880*730	1895*880*730
Unit dimension (W/D/H inch)	36.2"X32.3"X27"	52.8"X32.3"X27"	72.2"X32.3"X27"
Packing dimension (W/D/H inch)	38.5" *34.6" *28.7"	55" *34.6" *28.7"	74.6" *34.6" *28.7"
Net capacity(CUFT)	4.66	7.94	11.79
Capacity(L)	132	225	334
Controller brand	Carel	Carel	Carel
Number of drawers	2	2	4
Cooling Type	Ventilated	Ventilated	Ventilated
Compressor	HUAYI/NUT45NR	HUAYI/NUT45NR	HUAYI/NUT45NR
Kind of coolant	R290/60g	R290/75g	R290/100g
Temperature (F)	32~41	32~41	32~41
Kind of coolant	R290	R290	R290
40 'HC Container loading	78	48	39

UPRIGHT CHILLER/FREEZER



Optional
Standard



SR-20G



SR-20VDG



SR-20V-2D

Features

- European standard glass door upright chiller
- Digital Thermostat
- Lock and key
- Fan assisted cooling system
- Revisable self-closing door
- Roll bond plate with fan
- Two front adjustable feet, two rear wheels

Options

- Outside door stainless steel material or white prepainted steel
- Eliwell / Dixell

Product Model	SR-20G	SR-20VDG	SR-20V-2D
Unit dimensions (W/D/H mm)	595*653*870	600*620*900	595*615*870
Net capacity (L)	170	170	170
Cooling system	Static	Static	Static
Temperature (°C)	0~+8	0~+8	0~+8
Shelves No.	2+1	2+1	2+1
Interior light	Yes	Yes	Yes
Compressor	ZEL/ZEL	Jiaxipera	Jiaxipera
Digital thermostat	Dixell	Hongke	Hongke
Kind of coolant	R134A/R600a	R600A	R600A
40' Container loading	108	114	114

UPRIGHT CHILLER/FREEZER



STAINLESS STEEL



SR-40G



SR-60VG

Features

- European standard glass door upright chiller
- Digital Thermostat
- Lock and key
- Fan assisted cooling system
- Revisable self-closing door
- Roll bond plate with fan
- Two front adjustable feet, two rear wheels

Options

- Outside door stainless steel material or white prepainted steel
- Eliwell / Dixell

Product Model	SR-40G	SR-40VG	SF-40VG	SR-60G	SR-60VG	SF-60VG
Unit dimensions (W/D/H mm)	595*635*1840	595*635*1840	595*635*1840	775*705*1840	775*705*1840	775*705*1840
Net capacity (L)	380	380	380	590	590	590
Cooling system	Static with fan cooling	Ventilated	Ventilated	Static with fan cooling	Ventilated	Ventilated
Temperature (°C)	0~+8	0~+8	-18	0~+8	0~+8	-18
Shelves No.	3+1	3+1	6+1	3+1	3+1	6+1
Interior light	Yes	Yes	Yes	Yes	Yes	Yes
Compressor	ZEL/ZEL	ZEL/ZEL	Embraco/ZEL	ZEL/ZEL	ZEL/ZEL	Embraco/ZEL
Digital thermostat	Dixell	Dixell	Dixell/Elitech	Dixell	Dixell	Dixell/Elitech
Kind of coolant	R134A/R600A	R134A/R600A	R404A/R290	R134A/R600A	R134A/R600A	R404A/R290
40' Container loading	54	54	54	42	42	42


UPRIGHT CHILLER/FREEZER



SPRAYING COAT



SR-20

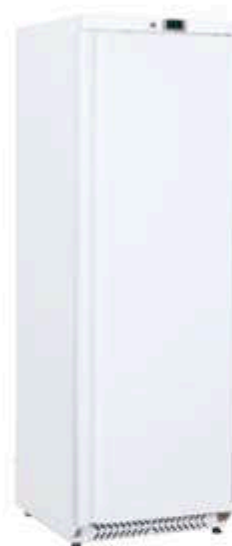

SR-40



SR-60

Features

- European standard white prepainted solid door upright chiller/freezer
- Digital Thermostat
- Lock and key
- Fan assisted cooling system
- Reversible self-closing door
- Roll bond plate with fan for chiller
- 7 layer of evaporator as shelves for freezer
- Two front adjustable feet, two rear wheels

Options

- Outside stainless steel material or glass
- Eliwell / Dixell

Product Model	SR-20	SR-40	SR-40V	SR-60	SR-60V
Unit dimensions (W/D/H mm)	595*653*870	595*653*1840	595*653*1840	775*723*1840	775*723*1840
Net capacity (L)	143	356	356	580	580
Cooling system	Static	Static with fan cooling	Ventilated	Static with fan cooling	Ventilated
Temperature (°C)	0~+8	0~+8	0~+8	0~+8	0~+8
Shelves No.	2+1	3+1	3+1	3+1	3+1
Interior light	No	No	No	No	No
Compressor	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL	ZEL/ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R134A/R600A	R134A/R600A	R134A/R600A	R134A/R600A	R134A/R600A
40' Container loading	108	54	54	42	42

UPRIGHT CHILLER/FREEZER



STAINLESS STEEL



SF-20S



SF-40VS



SF-60VS

Features

- European standard white prepainted solid door upright chiller/freezer
- Digital Thermostat
- Lock and key
- Fan assisted cooling system
- Reversible self-closing door
- Roll bond plate with fan for chiller
- 7 layer of evaporator as shelves for freezer
- Two front adjustable feet, two rear wheels

Options

- Outside stainless steel material/Eliwell / Dixell

Product Model	SF-20	SF-40V	SF-60V
Unit dimensions (W/D/H mm)	595*653*870	595*653*1840	775*723*1840
Net capacity (L)	143	345	506
Cooling system	Static	Ventilated	Ventilated
Temperature (°C)	-18	-18	-18
Shelves No.	2+1	6+1	6+1
Interior light	No	No	No
Compressor	ZEL/ZEL	Embraco/ZEL	Embraco/ZEL
Digital thermostat	Dixell/Elitech	Dixell/Elitech	Dixell/Elitech
Kind of coolant	R134A/R600A	R404A/R290	R404A/R290
40' Container loading	108	54	42



This stainless steel work table is the popular model in Europe and Middle East, we offer various customized design from the sizes to materials, economic type or premium type, thickness of steel range from 0.6mm to 1.5mm for different applications.



MODEL: WT




"Worktop made of double walled stainless steel, 5-6cm work top, lined with high density of fiberboard, low noise and heavy duty, stainless steel channels reinforce the back and support the work top"




worktop is lined with MDF (Medium Density Fiberboard), moisture resistance, stronger and more durable.



complete stainless steel materials, stainless U shape channel to reinforce the back, sound proof and higher loading capacity

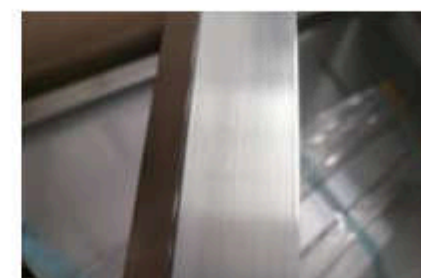

38x38mm / 40x40mm square legs, brushed surface

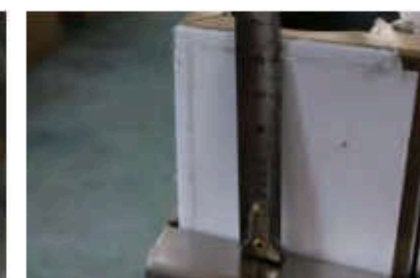

Unique design of the assembling, very solid and easy to assemble.



ABS+steel pillar adjustable feet, loading capacity above 500kgs.

01

WORKBENCH PRODUCT SERIES

工作台产品系列





Length 90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



24"×24"×34" 30"×30"×34"
24"×30"×34" 30"×36"×34"
24"×36"×34" 30"×48"×34"
24"×48"×34" 30"×60"×34"
24"×60"×34" 30"×72"×34"
24"×72"×34" 30"×84"×34"
24"×96"×34" 30"×96"×34"



Length 90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



Length 80/90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



Length 90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



Length 80/90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



Length 80/90/100/120/150/180/200/220cm
Depth 60/70cm
Height 85cm



Length 860/70/80cm
Depth 860/70cm
Height 885/90cm

02

COMMERCIAL KITCHEN SINKS


商用厨房水槽

**worktop:**

"Stretched work top, which could keep the water inside the sink
Drainboards could drain the water when you put vegetables or dishes on it"

**Undershelf:**

complete stainless steel materials, stainless U shape channel to
reinforce the back, sound proof and higher loading capacity

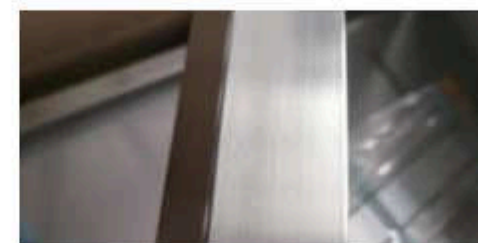**Legs:**

38×38mm / 40×40mm square legs, brushed surface

**Feet:**

ABS+steel pillar adjustable feet, loading capacity above 500kgs.



"We offer various of sinks and can provide customized designs. Typically, the sink materials we use are either stainless steel 201 or stainless steel 304. In comparison, stainless steel 304 has better rust resistance performance, but it is also more expensive. Depending on the environment you will be using the sinks in, we will provide you with the best choice. We can also use a combination of materials, such as using stainless steel 304 for the countertop and stainless steel 201 for other parts.

As a manufacturer, we are very flexible and can provide you with the optimal choice based on your market situation. If you are looking for a more competitive price, then stainless steel 201 would be more suitable, and using thinner sheets like 0.7mm or 0.6mm would greatly reduce costs."

TECHNICAL INFORMATION 技术参数

E-Europe	S-Single	S-Sink		
Model No.	Name	Dimension(LxWxH) mm	Sink Dim(mm)	Sink Drawing
ES1S67	Single Bowl Sink	600x700x850	400x500x250	
ES1S77	Single Bowl Sink	700x700x850	500x500x250	
ES1S87	Single Bowl Sink	800x700x850	600x500x250	
ES1SL107	Single Sink with Left Drainboard	1000x700x850	400x500x250	
ES1SL127	Single Sink with Left Drainboard	1200x700x850	500x500x250	
ES1SL147	Single Sink with Left Drainboard	1400x700x850	500x500x250	
ES1SL107	Single Sink with Right Drainboard	1000x700x850	400x500x250	
ES1SL127	Single Sink with Right Drainboard	1200x700x850	500x500x250	
ES1SL147	Single Sink with Right Drainboard	1400x700x850	500x500x250	
ED2S107	Double Bowl Sink	1000x700x850	400x500x250	
ED2S127	Double Bowl Sink	1200x700x850	500x500x250	
ED2S147	Double Bowl Sink	1400x700x850	500x500x250	
ED2SL147	Double Sink with Left Drainboard	1400x700x850	400x500x250	
ED2SL167	Double Sink with Left Drainboard	1600x700x850	400x500x250	
ED2SL187	Double Sink with Left Drainboard	1800x700x850	500x500x250	
ED2SL207	Double Sink with Left Drainboard	2000x700x850	500x500x250	
ED2SR147	Double Sink with Right Drainboard	1400x700x850	400x500x250	
ED2SR167	Double Sink with Right Drainboard	1600x700x850	400x500x250	
ED2SR187	Double Sink with Right Drainboard	1800x700x850	500x500x250	
ED2SR207	Double Sink with Right Drainboard	2000x700x850	500x500x250	
ED2SLR187	Double Sink with Left & Right Drainboard	1800x700x850	500x500x250	
ED2SLR207	Double Sink with Left & Right Drainboard	2000x700x850	500x500x250	



Commercial Sink

Model	DSS
Length	160/180/200/210cm
Depth	60/70cm
Height	85+10cm



Stainless Steel Sink

Model	DSS
Length	160/180/200/210cm
Depth	60/70cm
Height	85+10cm



Stainless Steel Sink Welding Bowl

Model	SSW
Length	100/120/140/160/180/200/210cm
Depth	60/70cm
Height	85+10cm



Sink cabinet with hinged doors

Model	SCBR1-H
Length	100/120/140/160/180/200/210cm
Depth	60/70cm
Height	85+10cm



Double Sink bench with Wasing basin

Model	DSBW
Length	180/200/210cm
Depth	60/70cm
Height	85+10(15)cm



Sink cabinet with sliding doors

Model	SCBR1-H
Length	100/120/140/160/180/200/210cm
Depth	60/70cm
Height	85+10cm



Sink with under shelf

Model	DSUS
Length	120/140cm
Depth	60/70cm
Height	85+10cm



Double Sink Bench

Model	DSB
Length	150/160/180/200/210cm
Depth	60/70cm
Height	85+10(15)cm



foot pedal sinks

Model	HWSF
Size	40cm×40cm×85cm





Hand wash sink high splash back

Model KHWS-H
Size 40cm×34cm×(20+38.4)cm



Knee Operated hand wash sink

Model KHWS
Size 430×370×270cm



Mop sink

Model MS
Size 50cm×60cm×85cm
50cm×70cm×85cm

OTHER COMMERCIAL KITCHEN SINKS MODEL 其它商用水槽模型



ESR SBL1



ESR SBL2



ETR SBL1



ETR SBL2



ESR SBR1 RANGE



ESR SBR2



ETR SBR1



ETR SBR2

WALL CABINET ASSEMBLED 吊柜



Stainless Steel Sink Welding Bowl

Model	WCD
Length	80/90/100/120/150/180/200/220cm
Depth	40cm
Height	60/65cm



Model Features:


- Material: Standard SUS 304/201/430 with good quality, less fingerprints.
- STRUCTURE: Rivet construction, solid and no shaking
 - (1)Welded
 - (2)knock down(assembled) type
 - (3)Not assembled type(Flat Pack)
- Doors: Sliding doors, double layers, mute and easy to push
- Appearance: No welding scars, No scratches, clean and tidy.

WALL CABINET NOT ASSEMBLED 组装款吊柜



Stainless Steel Sink Welding Bowl

Model	WC-F
Length	80/90/100/120/150/180/200/220cm
Depth	40cm
Height	60/65cm

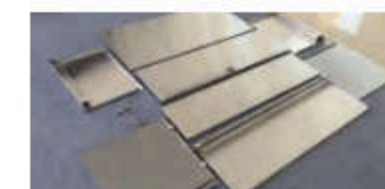

03

CABINET WITH SLIDING DOORS

拉门柜



Stainless steel cabinet

Model	CS
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Sink Cabinet Bowl Right with Hinged Doors

Model	SCHDBR1
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Stainless steel cabinet with back splash

Model	CSR
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Work cabinet with drawers & sliding doors

Model	CWDL3 /CWDR3
Length	150/160/180/200/220cm
Depth	60/70cm
Height	85cm



Stainless Steel Cabinet with Hinged Doors

Model	CSH
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Work cabinet with drawers & sliding doors

Model	CWDL3-R /CWDR3
Length	150/160/180/200/220cm
Depth	60/70cm
Height	85cm





Corner Cabinet

Model	CorC
Length	100/120cm
Depth	60/70cm
Height	85cm



Drawer Cabinet

Model	DC
Length	60/70/80/90cm
Depth	60/70cm
Height	85cm



Corner Cabinet with back splash

Model	CC-R
Length	100/120cm
Depth	60/70cm
Height	85cm



Upright Cupboard

Model	UC
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Corner wall cabinet

Model	CorWC
Length	100/120cm
Depth	60/70cm
Height	85cm





Hot Cupboard

Model	HC
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm



Hot Cupboard with back splash

Model	HCR
Length	100/120/150/180/200/220cm
Depth	60/70cm
Height	85cm

Model Features:

- Structure: welded, integral one
- Function: Plates, trays Warming and Infrared sterilization
- Heating: electrical Heating
- Voltage & Power: 220/240V, 2.8KW
- Doors: Sliding doors, smooth and low noise, when you close it, it has a shackle in case of it springback
- Middle Shelf: one layer middle shelf, which the height could be adjustable by customer
- Size: Size could be customized
- Surface: covered with film to protect the surface

04

HOT CUPBOARD

暖碟台



Plates Warmer with Hinged Doors

Model	PWH
Length	45/75cm
Depth	48.5cm
Height	85/90cm

Model Features:

- ▶ Structure: welded, integral one with thermal insulation layer inside
- ▶ Function: Plates, trays Warming, Hot air circulation +Infrared ray disinfection Infrared sterilization
- ▶ Heating: electrical Heating
- ▶ Voltage & Power: 220/240V, 2.8KW
- ▶ Doors: two hinged doors
- ▶ Middle Shelf: one layer middle shelf, which the height could be adjustable by customer
- ▶ Size: Size could be customized

05

COMMERCIAL BOX GREASE EXTRACTION HOOD

商用不锈钢烟罩



Commercial Box Grease Extraction Hood

Model	EH-B
Length	100/120/150/180/200/220cm
Depth	70/90cm
Height	45/50cm

This box shape grease exhaust hood exhausts the heat, smoke, and grease produced by cooking equipments.



Stainless Steel Grease Filter

Popular Size

495mm x 495mm x 48mm

395mm x 495mm x 48mm

295mm x 495mm x 48mm

595mm x 595mm x 48mm



Wall Type Extraction Canopy With Grease Filters

Model	EH-W
Length	100/120/150/180/200/220cm
Depth	70/90cm
Height	45/50/60/75cm

Model Features:

- Materials: 100% stainless steel constructed, 304 steel, 201 steel, 430 steel for choice.
- Constructed in stainless steel completely
- Size is customized
- Beautiful welding looks
- Stainless Steel Baffle Filters included
- Hanging brackets
- Stainless steel grease trough and cup
- Stainless steel filters included

- Materials: stainless steel 201 or 304
- Safety edges on frame and blades
- Anti-rust and smooth surface
- It is assembled by rivet, no welding scars outside



Baffle Type Grease Filter

Popular Size

495mm x 495mm x 48mm

395mm x 495mm x 48mm

295mm x 495mm x 48mm

595mm x 595mm x 48mm

- The baffle is made by mould, therefore, all the baffles are standard ones with unified looks
- It is light but sturdy
- The baffle and the frame are made from 430 Stainless Steel. Mirror finish.
- Anti-rust and smooth surface
- It is assembled by rivet, no welding scars outside



Honeycomb grease filter



Popular Size

495mm x 495mm x 50mm

394mm x 495mm x 50mm

254mm x 495mm x 50mm

254mm x 394mm x 50mm

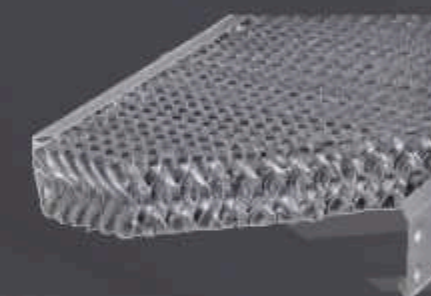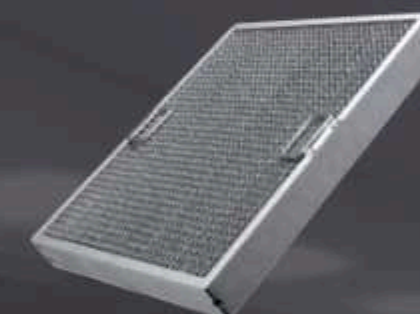

- Made of a honeycomb-shaped aluminum core and an aluminum alloy frame folded from aluminum foil
- large specific surface area
- The filter adopts an S-shaped rolling process, increasing the contact area with oil fumes while maintaining low air resistance.



06

ELECTRICAL STEAM TABLE WITH OVER SHELVES

售饭台



Length
Depth
Height



Model Features:

This electrical Bain Marie is used to warm the food by heating the water below the G/N Pans, there are different size of G/N pans for different application of food. By adjusting the temperature controller to keep the food in an ideal temperature.

- Power: 3.5KW/ 5KW
- Voltage/Frequency: 220~240V, 50/60Hz
- Heating Method: electrical heating through water
- Temperature Range: 30°C - 85°C
- Dimensions(top Shelf): 300mm (depth) * 600mm(height)
- G/N Pans: 1/1 Pans, 1/2 Pans, 1/3 Pans, 1/4 Pans for choice, 201 steel and 304 steel are available.
- Over shelves: could be taken down when pack them
- Glass Shape: Curved
- Structure: Assembled, flat pack, the legs could be taken down, which reduce the volume of the package.
- Size is customized



Length
Depth
Height



Model Features:

- Power: 3.5KW/ 5KW
- Voltage/Frequency: 220~240V, 50/60Hz
- Heating Method: electrical heating through water
- Temperature Range: 30°C - 85°C
- Dimensions(top Shelf): 300mm (depth) * 600mm(height)
- G/N Pans: 1/1 Pans, 1/2 Pans, 1/3 Pans, 1/4 Pans for choice, 201 steel and 304 steel are available.
- Over shelves: could be taken down when pack them
- Glass Shape: Curved
- Structure: Assembled, flat pack, the legs could be taken down, which reduce the volume of the package.
- Size is customized



07

STORAGE SHELVES

不锈钢货架



Storage Shelves Four Tiers

Model	SHELF4
Length	100/120/140/150/160/180/200cm
Depth	50/60cm
Height	160cm



Three tiers Wall mounted Shelves

Model	WS3
Length	60/80/100/120/140/150/160/180/200cm
Depth	30/40cm
Height	110cm



Single tier Wall mounted Shelf

Model	WS1
Length	60/80/100/120/140/160/180/200cm
Depth	30/40cm
Height	35cm



Solid Wall Shelf

Model	SWS
Length	60/80/100/120/140/150/160/180/200cm
Depth	30/40cm
Height	27cm



Two tiers Wall mounted Shelves

Model	WS2
Length	60/80/100/120/140/160/180/200cm
Depth	30/40cm
Height	70cm





Always on the way to perfection.
We customize for you.

CONTACT

Email: sales@acenoxappliances.com

Tel / WhatsApp: +1 737 248 0271

Website: <https://acenoxappliances.com>

Factory 1: 239 Road, East Industrial Zone, Binzhou City, Shandong Province, China

Factory 2: Haihe Road, Jimo District, Qingdao City, Shandong Province, China

Factory visits welcome. Custom sizes, finishes and OEM branding available.